

Full HD 1080p Projector

Ideal for Home Entertainment

PJD7822HDL



The ViewSonic® PJD7822HDL is an affordable, yet powerful 1080p projector that delivers Full HD entertainment ideal for any home theater. A high-brightness output ensures crisp, clear images even in rooms with high ambient light, while true-to-life colors and enhanced sound deliver an immersive viewing experience. Dual HDMI inputs offer easy setup and flexible connectivity to high-definition devices, as well as compatibility with wireless HDMI dongles such as Google Chromecast™, Roku® Streaming Stick™, and Amazon Fire TV Stick™. So whether projecting movies from a Blu-ray player, or wirelessly streaming content, the PJD7822HDL is the ideal projector for multimedia entertainment at home.

Key Features:

Full HD 1080p native resolution for vivid and detailed images

Up to 3200 ANSI lumen brightness and 15,000:1 contrast ratio

SuperColor™ technology for vibrant, stunning images

Dual HDMI video inputs for greater connectivity with HD devices

Powered USB A port (5V/1A) for wireless HDMI dongles such as Google Chromecast, Roku Streaming Stick, and Amazon Fire TV Stick


Designed for:

Home entertainment

Full HD 1080p Projector

PJD7822HDL

Projection Distance		Screen Size (16:9) Diagonal	
Inches	Meters	Inches	Meters
30-39	0.77-1.0	30	0.8
40-52	1.02-1.33	40	1.0
50-65	1.28-1.66	50	1.3
60-78	1.53-1.99	60	1.5
70-92	1.79-2.32	70	1.8
80-105	2.04-2.66	80	2.0
91-118	2.3-2.99	90	2.3
101-131	2.55-3.32	100	2.5
121-157	3.07-3.98	120	3.0
151-196	3.83-4.98	150	3.8
201-261	5.11-6.64	200	5.1
251-327	6.39-8.3	250	6.4
302-392	7.66-9	300	7.6

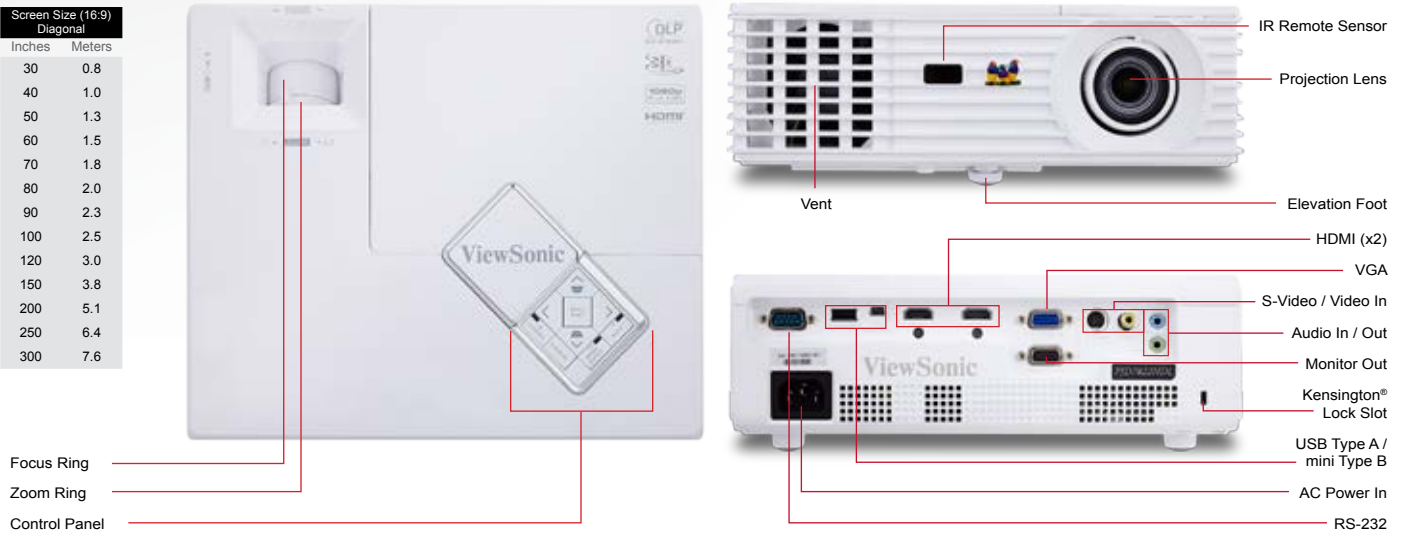

Specifications

DISPLAY	Type	0.65" Digital Micromirror Device (DLP™)
	Resolution	1080p 1920x1080 (native)
	Lens	1.3x manual optical zoom / manual optical focus
	Keystone	Manual vertical digital keystone correction (± 40°)
	Size	30 – 300 in. / 0.76 – 7.62 m (diagonal)
	Throw Distance	3.3 – 32.8 ft. / 1.0 – 10.0 m
	Throw Ratio	1.15~1.5:1
	Lamp	210 watt
	Light Life	5000 / 6000 / 8000 hours* (Normal / Eco-mode / Dynamic)
	Brightness	3200 lm
Contrast Ratio	15,000:1 (dynamic mode)	
Aspect Ratio	16:9 (native)	
Color Depth	30 bits, 1.07B Color (10+10+10)	
INPUT SIGNAL	Computer and Video	NTSC M(3.58MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, L, L1), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p Fh: 15–100KHz, Fv: 24–120Hz
	Frequency	
COMPATIBILITY	PC	Up to 1600x1200
	Mac®	Up to 1920x1200 (may require MAC adapter)
CONNECTOR	RGB Input	15-pin mini D-Sub
	RGB Output	15-pin mini D-Sub
	Digital Input	HDMI (x2)
	Composite Input	RCA jack
	S-Video	4-pin mini-DIN
	Audio Input	3.5mm mini jack
	Audio Output	3.5mm mini jack
	USB	Type A (5V / 1A), mini type B
Control	RS232	
AUDIO	Speaker	2W x1
POWER	Voltage	100~240VAC (Auto Switching), 50-60Hz (universal)
	Consumption	264W (typ) / <0.5W (stand-by mode)

CONTROLS	Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
	OSD	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality)
OPERATING CONDITIONS	Temperature	32–104° F (0–40° C)
	Humidity	10–90% (non-condensing)
	Altitude	0–6,000 ft (1,800m), operational up to 10,000 ft (3,048m)
DIMENSIONS (W x H x D)	Physical	10.55 x 8.7 x 3.32 in. / 268 x 221 x 84.4 mm
	Packaging	14.17 x 7.4 x 12.8 in. / 360 x 188 x 325 mm
WEIGHT	Net	4.63 lb. / 2.1 kg
	Gross	7.48 lb. / 3.4 kg
REGULATIONS		UL/cUL, FCC-B (ICES-004), NOM, Argentina, PSB, C-tick, SASO, KC, CE, GOST-R, UkrSEPRO, EMC, CCC
WARRANTY		3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service*
OPTIONAL ACCESSORIES	Wireless Presentation Gateway	WPG-370
	3D Active Shutter Glasses	PGD-350
	Ceiling Mount Kit	WMK-005

What's in the box?

PJD7822HDL projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard DVD (with User Guide)



*Lamp life may vary based on actual usage and other factors. **One year Express Exchange® service requires product registration. Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. DLP® and DLP logo are registered trademarks of Texas Instruments. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Copyright © 2014 ViewSonic Corporation. All rights reserved. [17413-00B-09/14]

www.viewsonic.com

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.