

Portable XGA Projector. Bright, Light, and Portable

ViewSonic
See the difference™ 

PJD5232L



The ViewSonic® PJD5232L is the ideal projector in the office or on the campus. It delivers amazingly clear images with 3000 ANSI lumens, 15000:1 contrast ratio and XGA 1024x768 native resolution. The PJD5232L is packed with features including multiple PC and video input options, 1.1x optical zoom, keystone correction, PC 3D-ready/120Hz, integrated speaker and DynamicEco™. With DynamicEco™ technology, presenters can put the projector in "standby" mode by reducing brightness down to 30% when they need to shift audience's focus or when the projector is not in use without restarting the projector. Filter-less design and energy-saving eco-mode provide for virtually zero maintenance and product reliability. Slim design, 3.7" high with only 4.7 lbs, makes the PJD5232L the perfect projector for tabletop use or ceiling mounting in both classrooms and corporate offices.

Just Right for Classroom & Conference Room


Packed with 3000 lumens and a high contrast ratio of 15,000:1 (w/ DynamicEco), the PJD5232L is guaranteed to be bright and shine in classrooms and conference rooms.

Long Lamp Life up to 10,000 Hours

The new advanced lamp technology extends the lamp life up to 10,000 hours* and saves on maintenance costs.

Take Control of Audience's Focus

With the DynamicEco button on the remote, take command of presentations by dimming the screen image up to 70%. The projector will also auto activate DynamicEco when the unit is not in use. When DynamicEco is activated, the lamp's power consumption is significantly reduced – a great energy-saving design for low total cost of ownership (TCO).

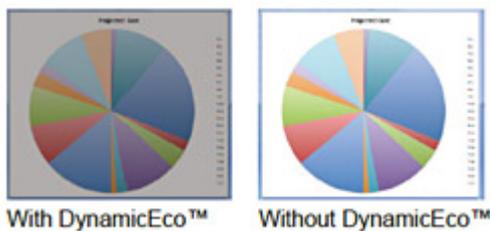

BrilliantColor™ Technology


ViewSonic's PJD5232L projector with BrilliantColor technology features multi-color processing to produce stunning, vibrant colors. Unlike other technologies such as LCD which use just 3 primary colors to produce the image, the PJD5232L uses up to 6 separate colors. The sophisticated 6-segment color wheel enhances the yellow color performance that is the key to accurate and vivid

Reliable Picture Quality & Color Performance

ViewSonic's DLP® projectors provide reliable picture quality you can trust and superior color performance you can count on after thousands of hours of usage. Built on DLP technology, the ViewSonic PJD5232L projector virtually eliminates image degradation known as color decay – yellow/faded tint that LCD projectors may develop after extended use. Even after years of use, the PJD5232L is still producing a stunning, sharp image that lasts.

PC 3D-Ready / 120Hz Refresh Rate Powered DLP® Link Technology

With support for DLP® Link technology, you'll have amazing 3D capabilities at your disposal. All that's required to unlock 3D capabilities on the ViewSonic PJD5232L 3D-ready projector are the ViewSonic PGD-250 3D active shutter glasses, 3D content and 3D-enabled video card. Unleash 3D experience with the ViewSonic PJD5232L today.

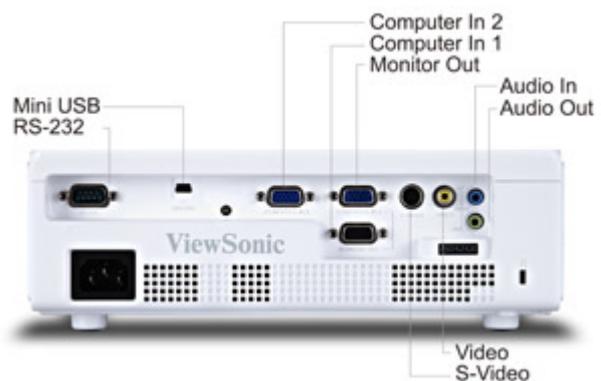

Maintenance Free

ViewSonic's PJD5232L projector features a filter-less design. Unlike LCD projectors that require the user to clean, sometimes to replace, filters after every 100 to 300 hours of operation, ViewSonic's PJD5232L projector is filter-less, eliminating the need for filter cleaning or filter replacement. This saves you significant maintenance dollars and labor over the projector's lifespan, and lowers

color reproduction. With multi-color processing, colors are richer and more vibrant with exquisite and precise detail.

App- ProjectorDistance App for Quick Projector Position Preview

No matter small meeting room, middle classroom, or big hall, ProjectorDistance tells you how far the projector should be placed according to the room ceiling height, projector’s screen size, aspect ratio, etc. Just input several figures, the result will be displayed in the simulation scenarios with measurement. You can use finger to adjust the distance instantly.



your total cost of ownership (TCO).

App- The world’s pioneer ProjectorExpert APP Cover all completed projector applications at once!

ProjectorExpert APP contains all ViewSonic projector product information, projection distance measurement, ViewSync wireless introduction, industrial application case study, news messages, etc.. It integrates all projector related information and can be as general users’ perfect assistant when choosing or installing projectors, providing users’ a platform with convenient and sufficient information as well as to become dealers, distributors, system integrators’ portable tool which can check instantly.



Technical Specifications

Display	Type	0.55" Digital Micromirror Device (DLP™)
	Resolution	1024x768
	Lens	1.1x Manual optical zoom / manual optical focus
	Size	24 - 300 inch
	Throw Distance	1.0m - 12.0m
	Lamp	190 watt
	Brightness	3000 ANSI Lumens
	Contrast Ratio	15,000:1 (DCR)
	Keystone Correction	Vertical digital keystone correction (+/- 40°)
	Aspect Ratio	4:3 (native)
	Audio	Speakers
Input Signal	Video	NTSC M (3.58 MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, K, K1, L), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p
	Frequency	Fh: 31-100KHz; Fv: 48-120Hz
Compatibility	PC	VGA to 1600x1200 UXGA
	Mac	Up to UXGA (may require MAC adaptor)

Connector	RGB Input	15-pin mini D-sub (x2)
	RGB Output	15-pin mini D-sub
	Composite Video	RCA jack
	S Video	4-pin mini-DIN
	Component Video	15-pin mini D-sub (x2, shared with RGB)
	Audio	Input: 3.5mm mini jack (x2) Output: 3.5mm mini jack
	Control	RS-232 (DB-9)
	USB	Type B (for mouse control and service)
	Power	Voltage
Consumption		245W (typ) / <0.5W (stand-by mode)
Operating Conditions	Temperature	32°F-104°F (0°C-40°C)
	Humidity	10%-90% (non-condensing)
Dimensions	Physical	294mm (width) x 95mm (height) x 202mm (depth)
Weight	Net	2.1 kg
Regulations		CB, UL/cUL, FCC-B, NOM, Argentina, PSB, C-tick, SASO, KC, CE, GOST-R, UkrSEPRO, CCC, CECP, RoHS, REACH, SVHC, WEEE, ErP
Package Contents		PJD5232L projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard DVD (with User Guide)

08142015