




## VIEWSONIC 27" 1440P IPS ERGONOMIC MONITOR WITH 65W USB-C | VG2752-2K

### Key Features

---


- Versatile Monitor: 27 Inch QHD (2560x1440p) IPS monitor with thin bezels and 100Hz refresh rate
- Less Cable Clutter: USB-C connectivity for fast data, audio and video transfer, and 65W charging over one cable
- Ergonomic Stand: Advanced ergonomics (tilt, swivel, rotate and height adjustment) for all-day comfort
- Enhanced Viewing Comfort: Flicker-Free technology and Blue Light Filter for reduced eye fatigue
- Versatile Stand: Easy-to-install quick release stand with carrying handle and client mount
- Eco Friendly: 100% recyclable, FSC-certified eco-friendly packaging
- Flexible Connectivity: The VG2752-2K supports laptops, PCs, Macs and more with USB-C, HDMI, DisplayPort, VGA and USB inputs
- Optimized Pairing: Pair with a ViewSonic VG58 monitor to build the ultimate workstation




27"  
**DISPLAY**



IPS  
**PANEL**



2560x1440 @ 100Hz  
**RESOLUTION**

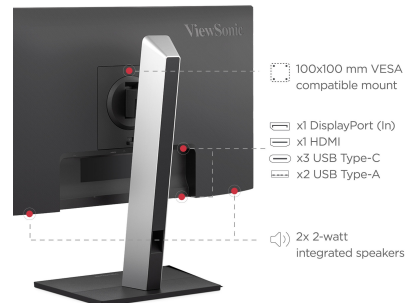

**FUTURE-PROOF  
CONNECTIVITY OPTIONS**

### Product Description

---

Transform your workspace with the ViewSonic® 27" VG2752-2K monitor. This 27" high-performance monitor offers stunning 2K resolution and SuperClear® IPS panel technology for vibrant, true-to-life colors. With USB-C connectivity, users can easily streamline their setup and cut out the cable clutter as they enjoy 65W of charging, data, audio, video, and power over a single cable. An HDMI port, DisplayPort, and an integrated USB hub (x2 USB-C ports, x2 USB-A ports) make it easy to connect your favorite devices. Designed for all-day comfort, this monitor features an ergonomic stand that allows for height, pivot, swivel, and tilt adjustments, while a 35-degree tilt makes it ideal for use with standing desks and team discussions. Unlock a seamless dual-monitor experience by pairing the VG2752-2K with the VG2758-2K docking monitor via USB-C daisy-chaining—delivering a sleek, clutter-free setup designed to elevate your productivity. Sustainability meets convenience with biodegradable packaging, a quick-deploy stand, integrated cable management, and a built-in client mount for a faster, cleaner installation.

# Specifications


|                             | More Information                                                            |
|-----------------------------|-----------------------------------------------------------------------------|
| UPC                         | 766907031768                                                                |
| Screen Size                 | 27"                                                                         |
| Viewable Area (in.)         | 27                                                                          |
| Panel Type                  | IPS                                                                         |
| Display Resolution          | 2560 x 1440                                                                 |
| Display Resolution          | QHD (2560x1440)                                                             |
| Static Contrast Ratio       | 1,500:1                                                                     |
| Dynamic Contrast Ratio      | 80,000,000:1                                                                |
| Light Source                | LED                                                                         |
| Brightness                  | 350 cd/m2                                                                   |
| Color Space Support         | 8 bit true                                                                  |
| Aspect Ratio                | 16:9                                                                        |
| Response Time (Typical GTG) | 5ms                                                                         |
| Viewing Angles              | 178º horizontal, 178º vertical                                              |
| Backlight Life (Hours)      | 30,000                                                                      |
| Panel Surface               | Anti-Glare type, Hard-coating (3H), Haze 25%                                |
| Refresh Rate                | 100Hz                                                                       |
| PC Resolution (max)         | 2560x1440 @ 100Hz                                                           |
| Mac® Resolution (max)       | 2560x1440 @ 100Hz                                                           |
| USB Type A                  | 2                                                                           |
| USB Type C                  | x1 (Upstream, v3.2 Gen2, DP Alt mode, 65W); x2 (Downstream, v3.2 Gen2, 15W) |
| HDMI 2.0 In                 | 1                                                                           |
| DisplayPort                 | 1                                                                           |
| Internal Speakers           | 2W (x2)                                                                     |
| Eco Mode (Conserve)         | 109W                                                                        |
| Eco Mode (optimized)        | 115W                                                                        |
| Consumption (typical)       | 120W                                                                        |
| Consumption (max)           | 200W                                                                        |
| Voltage                     | 100-240 VAC                                                                 |
| Stand-by                    | 0.5W                                                                        |
| Power Supply                | Internal                                                                    |
| Cable Organization          | Yes                                                                         |
| Kensington Lock Slot        | 1                                                                           |

|                                     |                                                                                                                                                                     |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Physical Controls</b>            | Joystick key: Up, Right, Down, Left, Center; Power                                                                                                                  |
| <b>On Screen Display</b>            | Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu                                                                                 |
| <b>Temperature</b>                  | 32-104º F (0 - 40º C)                                                                                                                                               |
| <b>Humidity (non-condensing)</b>    | 20-90%                                                                                                                                                              |
| <b>VESA Compatible</b>              | 100 x 100 mm                                                                                                                                                        |
| <b>Height Adjust</b>                | 150 mm / 5.9 in                                                                                                                                                     |
| <b>Swivel</b>                       | 90º                                                                                                                                                                 |
| <b>Pivot (Right/Left)</b>           | 90º / 90º                                                                                                                                                           |
| <b>Tilt (Forward/Back)</b>          | 5º / 30º                                                                                                                                                            |
| <b>Regulations</b>                  | cTUVus, FCC0B, ICES003, Energy Star 8.0, EPEAT Silver, CEC                                                                                                          |
| <b>Net (lbs)</b>                    | 16.4                                                                                                                                                                |
| <b>Net Without Stand (lbs)</b>      | 11.0                                                                                                                                                                |
| <b>Gross (lbs)</b>                  | 22.4                                                                                                                                                                |
| <b>Net (kg)</b>                     | 7.4                                                                                                                                                                 |
| <b>Net Without Stand (kg)</b>       | 5.0                                                                                                                                                                 |
| <b>Gross (kg)</b>                   | 10.2                                                                                                                                                                |
| <b>Packaging (in.)</b>              | 27.6.5 " (W) x 16.7 " (H) x 7.4 " (D)                                                                                                                               |
| <b>Physical (in.)</b>               | 24.12 " (W) x 15.84 " ~ 20.69" (H) x 8.6 " (D)                                                                                                                      |
| <b>Physical Without Stand (in.)</b> | 24.12 " (W) x 14.16" (H) x 1.76 " (D)                                                                                                                               |
| <b>Packaging (mm)</b>               | 702 mm (W) x 425 mm (H) x 166 mm (D)                                                                                                                                |
| <b>Physical (mm)</b>                | 612 mm (W) x 402 ~ 526 mm (H) x 218 mm (D)                                                                                                                          |
| <b>Physical Without Stand (mm)</b>  | 612 mm (W) x 360 mm (H) x 45 mm (D)                                                                                                                                 |
| <b>Package Contents</b>             | VG2752-2K, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort Cable (v1.4; Male-Male) x1, USB Type-C Gen2 Cable (Male-Male; with Type-A adapter) x1, Quick Start Guide x1 |
| <b>Recycle/Disposal</b>             | Please dispose of in accordance with local, state or federal laws.                                                                                                  |
| <b>Warranty</b>                     | Three-year limited warranty on parts, labor and backlight                                                                                                           |


UPC: 766907031768



**SEAMLESS USB-C  
SINGLE CABLE CONNECTIVITY**



**ADVANCED ERGONOMICS**



**QUAD HD (2560x1440p)  
RESOLUTION**

**Contact Sales**  
[ViewSonic.com](https://www.viewsonic.com)

888.881.8781  
email:  
[salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)