



VIEWSONIC 32" CURVED 1440P 1MS 180HZ GAMING MONITOR WITH FREESYNC | VX3228C-2K

Key Features


- See The Difference: 32 Inch QHD (2560x1440p) IPS gaming monitor with thin bezels
- Maximized Gameplay: 180Hz refresh rate and 1ms (MPRT) response time for ultimate gaming experience
- Ultra-Smooth Gaming: AMD FreeSync technology enables fluid and tear-free gameplay
- HDR10 Content Support: For deep contrast, rich color, and vibrant details
- Flexible Connectivity: The VX3228C-2K supports laptops, PCs, Macs and more with HDMI, and DisplayPort inputs




32"
DISPLAY



MVA
PANEL



2560x1440
RESOLUTION

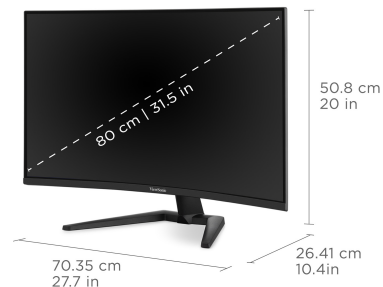

**QHD (2560x1440p)
RESOLUTION**

Product Description



Work hard and play harder with the ViewSonic® VX3228C-2K monitor. Designed with an immersive 32" 1000R curved screen and stunning WQHD 2560 x 1440 resolution, the VX3228C-2K monitor provides an incredible viewing experience for both office use and home entertainment. And with features including a 180Hz* refresh rate, 1ms (MPRT) response time and AMD FreeSync™ technology, this monitor virtually eliminates screen tearing and stuttering for a silky-smooth gaming experience. The VX3228C-2K also comes equipped with ViewSonic's exclusive ViewMode™ presets, which deliver optimized screen performance for various usage scenarios. Two HDMI (v2.0) inputs and one DisplayPort (v1.4) input offer flexible connectivity for your favorite devices.

*180Hz refresh rate with DisplayPort

Specifications

	More Information
UPC	766907028232
Screen Size	32"
Viewable Area (in.)	31.5
Panel Type	MVA
Display Resolution	2560 x 1440
Display Resolution	WQHD (2560x1440)
Static Contrast Ratio	3,000:1
Dynamic Contrast Ratio	50,000,000:1
Light Source	LED
Brightness	300 cd/m2
Colors	16.7M
Color Space Support	6 bit + FRC
Aspect Ratio	16:9
Response Time (Typical GTG)	2ms
Response Time (MPRT)	1ms
Viewing Angles	178º horizontal, 178º vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
Curvature	1000R
Refresh Rate	180Hz
PC Resolution (max)	2560x1440
Mac® Resolution (max)	2560x1440
3.5mm Audio Out	1
HDMI 2.0 In	2
DisplayPort	1
Internal Speakers	2W (x2)
Eco Mode (Conserve)	20W
Eco Mode (optimized)	23W
Consumption (typical)	26W
Consumption (max)	36W
Voltage	100-240 VAC
Stand-by	0.5W
Power Supply	External

Cable Organization	No
Physical Controls	Up, Right, Down, Left, Power
On Screen Display	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	HDMI: 28 ~ 214 KHz, DisplayPort: 28 ~ 263 KHz
Frequency Vertical	HDMI: 48 ~ 144 Hz, DisplayPort: 48 ~ 180 Hz
Tilt (Forward/Back)	5° / 22°
Regulations	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Bronze, CEC, NOM, Mexico Energy
Net (lbs)	11.8
Net Without Stand (lbs)	10.1
Gross (lbs)	16.5
Net (kg)	5.3
Net Without Stand (kg)	4.6
Gross (kg)	7.5
Packaging (in.)	30.8 x 19.7 x 8.1
Physical (in.)	27.7 x 20.0 x 10.4
Physical Without Stand (in.)	27.7 x 16.6 x 4.1
Packaging (mm)	782.0 x 500.0 x 205.0
Physical (mm)	702.5 x 507.9 x 262.8
Physical Without Stand (mm)	702.5 x 421.3 x 103.9
Package Contents	LCD Display, DisplayPort Cable, AC/DC Adapter, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	Three-year limited warranty on parts, labor and backlight
UPC: 766907028232	



Contact Sales
[ViewSonic.com](https://www.viewsonic.com)
 888.881.8781
 email:
salesinfo@viewsonic.com