



VP2776T-4K - 27" COLORPRO™ 4K UHD IPS DOCKING MONITOR WITH 100W THUNDERBOLT 4, RJ45, DCI-P3 AND HDR400

## Key Features




27"  
DISPLAY



IPS  
PANEL



3840 x 2160  
RESOLUTION

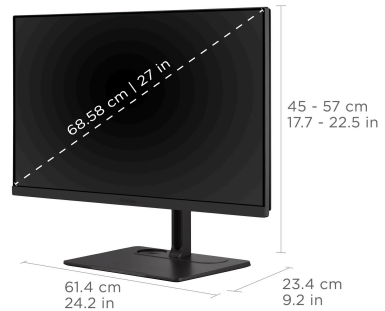

4K UHD (3840x2160p)  
RESOLUTION

## Product Description

The VP2776T-4K ColorPro™ Monitor is a powerhouse for creative professionals, engineers, programmers and more. This 27" Pantone Validated display delivers exceptional 4K visuals, accurate DCI-P3 colors, and HDR400 for deep contrast. Its integrated Thunderbolt 4 docking station offers 100W power delivery, RJ45 Ethernet, and multiple connectivity options such as DisplayPort, HDMI, and a USB hub for a streamlined workspace. With dual 4K daisy chaining via Thunderbolt 4, you can easily expand your display setup for maximum productivity.

## Specifications

More Information

UPC

766907031713

|                                    |  |
|------------------------------------|--|
| <b>Screen Size</b>                 | 27"  |
| <b>Viewable Area (in.)</b>         | 27   |
| <b>Panel Type</b>                  | IPS  |
| <b>Display Resolution</b>          | 3840 x 2160                                  |
| <b>Display Resolution</b>          | 4K (3840x2160)                               |
| <b>Static Contrast Ratio</b>       | 2,000:1                                      |
| <b>Dynamic Contrast Ratio</b>      | 20M:1  |
| <b>Light Source</b>                | LED  |
| <b>Brightness</b>                  | 400 cd/m2                                    |
| <b>Colors</b>                      | 1.07B  |
| <b>Color Space Support</b>         | 10 bit (8 bit + FRC)                         |
| <b>Aspect Ratio</b>                | 16:9   |
| <b>Response Time (Typical GTG)</b> | 5ms  |
| <b>Viewing Angles</b>              | 178° horizontal, 178° vertical               |
| <b>Backlight Life (Hours)</b>      | 30,000                                       |
| <b>Panel Surface</b>               | Anti-Glare type, Hard-coating (3H), Haze 25% |
| <b>Refresh Rate</b>                | 60Hz   |
| <b>PC Resolution (max)</b>         | 3840 x 2160                                  |
| <b>Mac® Resolution (max)</b>       | 3840 x 2160                                  |
| <b>USB Type A</b>                  | 3  |
| <b>USB Type C</b>                  | 100W x 1, 15W x 1                            |
| <b>USB Type C - Downstream</b>     | 1 (15W)                                      |
| <b>Mini USB</b>                    | 1  |
| <b>3.5mm Audio Out</b>             | 1  |
| <b>Ethernet LAN (RJ45)</b>         | 1  |
| <b>HDMI 2.1 In</b>                 | 2  |
| <b>DisplayPort</b>                 | 1  |
| <b>Thunderbolt 4</b>               | 2 (1 upstream / 1 downstream)                |
| <b>Internal Speakers</b>           | 3W (x2)                                      |
| <b>Eco Mode (Conserve)</b>         | 221  |
| <b>Eco Mode (optimized)</b>        | 227  |
| <b>Consumption (typical)</b>       | 235  |
| <b>Consumption (max)</b>           | 250  |
| <b>Voltage</b>                     | DC 24V                                       |
| <b>Stand-by</b>                    | 0.5  |
| <b>Power Supply</b>                | External                                     |

|                                     |  |
|-------------------------------------|--|
| <b>Cable Organization</b>           | No   |
| <b>Kensington Lock Slot</b>         | 1  |
| <b>Physical Controls</b>            | Joystick key: Up, Right, Down, Left, Center; Power   |
| <b>On Screen Display</b>            | Input Select, Color Mode, ViewMode, Audio Adjust, Setup Menu   |
| <b>Temperature</b>                  | 32-104° F (0 - 40° C)  |
| <b>Humidity (non-condensing)</b>    | 20-90%   |
| <b>VESA Compatible</b>              | 100 x 100 mm   |
| <b>Frequency Horizontal</b>         | 30 ~ 150 KHz   |
| <b>Frequency Vertical</b>           | 24 ~ 75 Hz   |
| <b>Height Adjust</b>                | 120 mm / 4.7 in  |
| <b>Swivel</b>                       | 120°   |
| <b>Pivot (Right/Left)</b>           | 90° / 90°  |
| <b>Tilt (Forward/Back)</b>          | 3° / 22°   |
| <b>Regulations</b>                  | cTUVus, FCC-B ICES003, Energy Star, EPEAT, CEC, NRCAN  |
| <b>Net (lbs)</b>                    | 16.8   |
| <b>Net Without Stand (lbs)</b>      | 9.3  |
| <b>Gross (lbs)</b>                  | 28.9   |
| <b>Net (kg)</b>                     | 7.6  |
| <b>Net Without Stand (kg)</b>       | 4.2  |
| <b>Gross (kg)</b>                   | 13.1   |
| <b>Packaging (in.)</b>              | 28.3 x 20.3 x 9  |
| <b>Physical (in.)</b>               | 24.16 x 17.73 ~ 22.46 x 9.21   |
| <b>Physical Without Stand (in.)</b> | 24.16 x 14.32 x 2.20   |
| <b>Packaging (mm)</b>               | 720 x 515 x 228  |
| <b>Physical (mm)</b>                | 613.7 x 450.36 ~ 570.36 x 234  |
| <b>Physical Without Stand (mm)</b>  | 613.7 x 363.85 x 55.8  |
| <b>Package Contents</b>             | LCD Display, DisplayPort Cable, HDMI Cable, Thunderbolt4 Cable, USB-C to USB-A Cable, Power Adaptor, Quick Start Guide |
| <b>Recycle/Disposal</b>             | Please dispose of in accordance with local, state or federal laws.   |
| <b>Warranty</b>                     | *Refurbished. 30-day DOA policy for full refund, with a 90-day repair warranty on parts and labor.                     |

UPC: 766907031713



**Contact Sales**  
[ViewSonic.com](https://www.viewsonic.com)  
 888.881.8781  
 email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)