




VIEWSONIC 3,000 ANSI LUMENS WXGA LED SHORT THROW PROJECTOR WITH H/V KEYSTONE, 4 CORNER ADJUSTMENT | LS560WH

Key Features


- Short Throw LED Projector: WXGA (1280x800p) resolution with a 0.5 throw ratio and 3,000 ANSI lumens for clear, detailed images in compact spaces
- Designed for Fast Paced Content: A low 16ms input latency and 120Hz refresh rate provides faster frame-by-frame action for smooth images with minimal delay
- Large Screen Projection: Projects screen sizes from 80" to 150" with a throw distance of 2.8 ft - 5.2 ft; displays a 100" image from 3.5 ft
- Easy Setup & Image Adjustment: Features 0.8x-2.0x digital zoom, H/V keystone, 360-degree projection, 4-corner adjustment, and auto keystone
- Advanced LAN Control: Remotely schedule and manage the projector via Crestron, AMX, Extron, PJ Link, ATEN, and ViewSonic vController
- Instant Power On/Off: Enables quick startup and shutdown with optional settings for automatic power control
- Versatile Installation Options: Supports table or ceiling installation and is compatible with ViewSonic mounts PJ-WMK-305 and PJ-WMK-007




30 - 300 in. / 0.76 - 7.62 m
DISPLAY



PANEL



VGA(640 x 480) to FullHD(1920 x 1080)
RESOLUTION

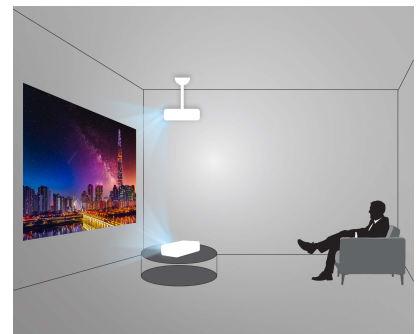

SHORT-THROW PROJECTOR

Ceiling or table-mounted, close to the screen

Product Description

The ViewSonic LS560WH short throw projector is ideal for both education and enterprise environments. Powered by lamp-free LED technology, this high-brightness projector can produce 3,000 ANSI lumens so that images and presentations can be easily viewed in environments with strong ambient light. Treat your audience to spellbinding presentations with vivid colors thanks to a wide color gamut. An eco-friendly, lamp-free design reduces maintenance and dramatically lowers your total cost of ownership, while a 0.49 short throw lens can create a 100" screen from just 3.6 ft. away. Enjoy convenient features like instant power on/off, image correction, flexible setup and so much more. This projector comes equipped with comprehensive LAN control for compatibility with Crestron, AMX, Extron, PJ Link, ATEN and ViewSonic® vController systems.

Specifications

	More Information
UPC	766907018127
Light Source	LED
Display Resolution	WXGA (1280x800)
Display Resolution	1280 x 800
Brightness (Lumens)	3,000 LED (2,000 ANSI)
Screen Size	30 - 300 in. / 0.76 - 7.62 m
Throw Distance	0.63m-1.58m (87"@0.92m)
Throw Ratio	0.49
Keystone	Vertical (+/- 40º) / Horizontal (+/- 40º)
Lens	Fixed Zoom
Light Source (watt)	RGB LED
Light Source Life, Normal (hours)	30000
Color Depth	1.07 Billion Colors
Dynamic Contrast Ratio	3,000,000:1
Aspect Ratio	16:10
Input Lag	37ms
Frequency Horizontal	15K~102KHz
Frequency Vertical	23-120Hz
PC Resolution (max)	VGA(640 x 480) to FullHD(1920 x 1080)
Mac® Resolution (max)	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
USB 2.0 Type A	1
Ethernet LAN (RJ45)	1
3.5mm Audio Out	1
3.5mm Audio In	1
Control (RS232)	1
HDMI 1.4 (with HDCP 1.4)	1
Internal Speakers	2W (x1)
Voltage	100-120V+/- 10%, 50/60Hz
Consumption (typical)	229W
Stand-by	<0.5W
Physical Controls	Keypad, Power key
On Screen Display	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)

Temperature	32-104º F (0 - 40º C)
Kensington Lock Slot	1
Net (lbs)	6.2
Gross (lbs)	8.3
Net (kg)	2.85
Gross (kg)	3.95
Packaging (in.)	11.5 x 8.7 x 4.5
Physical (in.)	15.2 x 11.8 x 7.4
Packaging (mm)	293 x 221 x 115
Physical (mm)	365 x 300 x 188
Regulations	cTUVus
Package Contents	Projector, power cable, remote control, Quick Start Guide
Warranty	Three-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.

UPC: 766907018127



Contact Sales [ViewSonic.com](https://www.viewsonic.com)

888.881.8781 
email:
salesinfo@viewsonic.com
