




VA2456A-MHD-1B - 24" 1080P IPS MONITOR WITH ADAPTIVE SYNC, HDMI, DISPLAYPORT, AND VGA


Key Features




24"
DISPLAY



IPS
PANEL



1920x1080
RESOLUTION

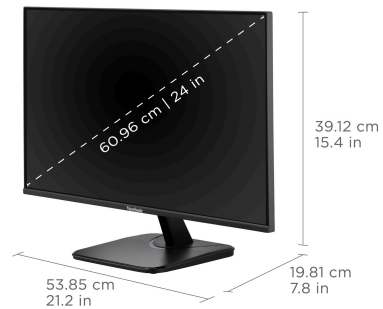

**FULL HD (1920X1080P)
RESOLUTION**

Product Description


With future-proof connectivity, the ViewSonic® VA2456a-MHD is a productivity-boosting monitor perfect for business applications. Designed with SuperClear® IPS panel technology for wide-angle viewing and incredibly vivid colors, this monitor also features a 3-sided frameless design for a seamless viewing experience in multi-monitor setups. Extensive connectivity options include VGA, HDMI, and DisplayPort so that you can connect to a variety of HD and analog devices – today and tomorrow. In addition, Flicker-Free technology and a Blue Light Filter help to minimize eye strain from extended viewing periods. With ViewSonic's industry-leading 3-year limited warranty, this monitor is a solid long-term investment for enterprise and home applications.

Specifications

	More Information
UPC	766907037128
Screen Size	24"
Viewable Area (in.)	23.8
Panel Type	IPS
Display Resolution	1920 x 1080
Display Resolution	Full HD (1920x1080)
Static Contrast Ratio	1,500:1
Dynamic Contrast Ratio	50,000,000:1
Light Source	LED
Brightness	250 cd/m2
Colors	16.7M
Color Space Support	6 bit + FRC
Aspect Ratio	16:9
Response Time (Typical GTG)	4ms
Viewing Angles	178° horizontal, 178° vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
Refresh Rate	120Hz
PC Resolution (max)	1920x1080
Mac® Resolution (max)	1920x1080
3.5mm Audio In	1
3.5mm Audio Out	1
VGA	1
HDMI 1.4 In	1
DisplayPort	1
Internal Speakers	2W (x2)
Eco Mode (Conserve)	14.5w
Eco Mode (optimized)	17.5w
Consumption (typical)	19.5w
Consumption (max)	19.5w
Voltage	100-240 VAC
Stand-by	.3w
Power Supply	Internal

Cable Organization	No
Kensington Lock Slot	1
Physical Controls	U, R, D, L, EN (power)
On Screen Display	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	miniHDMI (v2.0) = 24 ~ 165 KHz / USB-C = 165 ~ 165 KHz
Frequency Vertical	48 ~ 144 Hz
Tilt (Forward/Back)	4° / 20°
Regulations	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, RoHS, WEEE
Net (lbs)	6.8
Net Without Stand (lbs)	6
Gross (lbs)	9
Net (kg)	3.1
Net Without Stand (kg)	2.7
Gross (kg)	4.1
Packaging (in.)	24 " (W) x 16.5 " (H) x 5.3 " (D)
Physical (in.)	21.2 " (W) x 15.4 " (H) x 7.8 " (D)
Physical Without Stand (in.)	21.2 " (W) x 12.4 " (H) x 2 " (D)
Packaging (mm)	610 mm (W) x 418 mm (H) x 135 mm (D)
Physical (mm)	539.2 mm (W) x 390.1 mm (H) x 198.4 mm (D)
Physical Without Stand (mm)	539.2 mm (W) x 314.6 mm (H) x 49.9 mm (D)
Package Contents	LCD Display, HDMI Cable, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	*Refurbished. 30-day DOA policy for full refund, with a 90-day repair warranty on parts and labor.

UPC: 766907037128

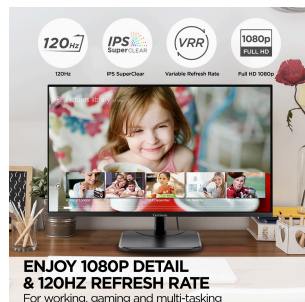

Contact Sales
ViewSonic.com

888.881.8781
 email:
salesinfo@viewsonic.com