

VIEWSONIC 27" 4K UHD ERGONOMIC MONITOR DESIGNED FOR SURFACE WITH 60W USB-C | VP275-4K

Key Features

- Versatile Monitor: 27 Inch HD (3840x2160p) 4K UHD IPS Designed for Microsoft Surface devices with thin bezels and 60Hz refresh rate
- Less Cable Clutter: In addition to fast data, audio and video transfer, USB-C also provides quick 60W charging over a single cable
- Exceptional Color Accuracy: 100% sRGB, EBU, SMPTE-C, Rec 709, and Delta E<2 accuracy
- Ergonomic Stand: Advanced ergonomics (tilt, swivel, rotate and height) for all-day comfort
- Optimized View Settings: Offers "Game," "Movie," "Web," "Text," and "Mono" presets
- Flexible Connectivity: The VP275-4K supports PC, laptops and more with USB-C, HDMI, and DisplayPort inputs




27"
DISPLAY



IPS
PANEL



3840 X 2160
RESOLUTION

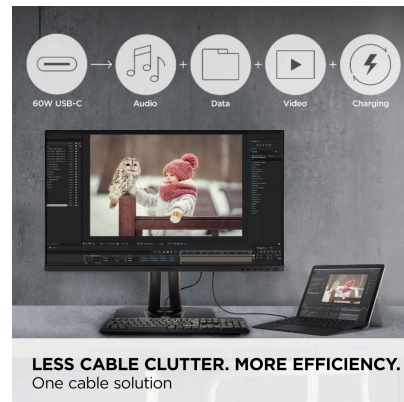

Product Description

Designed for Surface (DfS) products must meet the rigorous standards of Microsoft to ensure optimal compatibility with Microsoft Surface products.* The ViewSonic® VP275-4K monitor is compatible with all USB-C Surface devices and is ideal for office and home use. USB-C connectivity offers convenient charging power, video and audio over a single cable, and will charge your Surface device without the need for an additional power cable. Along with USB-C, additional connectivity options include HDMI, DisplayPort, and a USB hub. With Pantone Validation, stunning 4K Ultra HD (3840 X 2160p) resolution and incredible color accuracy, this monitor displays your work with the vivid detail and lifelike color it deserves. This 27" monitor also includes an advanced ergonomic design that features height adjustment, pivot, swivel and tilt for maximum comfort and enhanced productivity. *Microsoft, Microsoft Surface, Designed for Surface are trademarks of the Microsoft group of companies.

Specifications

	More Information
UPC	766907024227
Screen Size	27"
Viewable Area (in.)	27
Panel Type	IPS
Display Resolution	3840 x 2160
Display Resolution	4K (3840x2160)
Static Contrast Ratio	1,200:1
Dynamic Contrast Ratio	20,000,000:1
Light Source	LED
Brightness	360 cd/m2
Colors	1.07B
Color Space Support	10 bit (8 bit + FRC)
Aspect Ratio	16:9
Response Time (Typical GTG)	5ms
Viewing Angles	178° horizontal, 178° vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
Refresh Rate	60Hz
PC Resolution (max)	3840 X 2160
Mac® Resolution (max)	3840 X 2160
USB Type A	2
USB Type B	1
USB Type C	60W x 1
HDMI 2.0 In	2
DisplayPort	1
Internal Speakers	2W (x2)
Eco Mode (Conserve)	37.5W
Eco Mode (optimized)	39.5W
Consumption (typical)	42W
Consumption (max)	122W
Voltage	AC 100-240V (universal), 50-60Hz
Stand-by	0.3W
Power Supply	Internal

Cable Organization	Yes
Kensington Lock Slot	1
Physical Controls	Key 1, Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	HDMI 2.0, DisplayPort, USB Type C: 15 ~ 136 KHz
Frequency Vertical	HDMI 2.0, DisplayPort, USB Type C: 24 ~ 75 Hz
Height Adjust	130 mm / 5.1 in
Swivel	60°
Pivot (Right/Left)	90° / 90°
Tilt (Forward/Back)	5° / 21°
Regulations	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, NOM, Mexico Energy
Net (lbs)	16.9
Net Without Stand (lbs)	11.2
Gross (lbs)	22.5
Net (kg)	7.7
Net Without Stand (kg)	5.1
Gross (kg)	10.2
Packaging (in.)	29.1 x 18.3 x 8.9
Physical (in.)	24.1 x 16.15~21.27 x 8.5
Physical Without Stand (in.)	24.1 x 14.3 x 2.1
Packaging (mm)	740.0 x 465.0 x 225.0
Physical (mm)	613.0 x 410.31~540.31 x 215.0
Physical Without Stand (mm)	613.0 x 363.0 x 53.0
Package Contents	VP275-4K, Power Cable, HDMI to HDMI Cable, USB Type C cable, USB Type A/B Cable, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	Three-year limited warranty on parts, labor and backlight

UPC: 766907024227



Contact Sales

[ViewSonic.com](https://www.viewsonic.com)

888.881.8781

email: salesinfo@viewsonic.com