

# 43" Full HD LED Commercial Display

Convenience and Control for Hospitality Environments

**CDE4302**



Versatility and good looks go hand-in-hand in a display destined to shine in any hospitality, business, or retail environment. Loaded with control, management and connectivity features, the ViewSonic® CDE4302 43" commercial LED display makes it easy to deploy and maintain multiple screens throughout your establishment. From in-room entertainment to eye-catching digital signage to stunning sports coverage, guests will enjoy vibrant multimedia content – while you enjoy the convenience of customizable, automated multi-screen control. Plus, with a sleek finish, slim bezel and optional glass stand, it's sure to add appeal to any décor.

#### **Key Features:**

Integrated USB multimedia player

Free-bundled vController™ software

Hospitality mode for automated multi-screen control

Control multiple devices with HDMI® CEC and IR pass-through

Enhanced viewing comfort

#### **Designed for:**


Hospitality

Business

Retail

# 43" Full HD LED Commercial Display

**CDE4302**

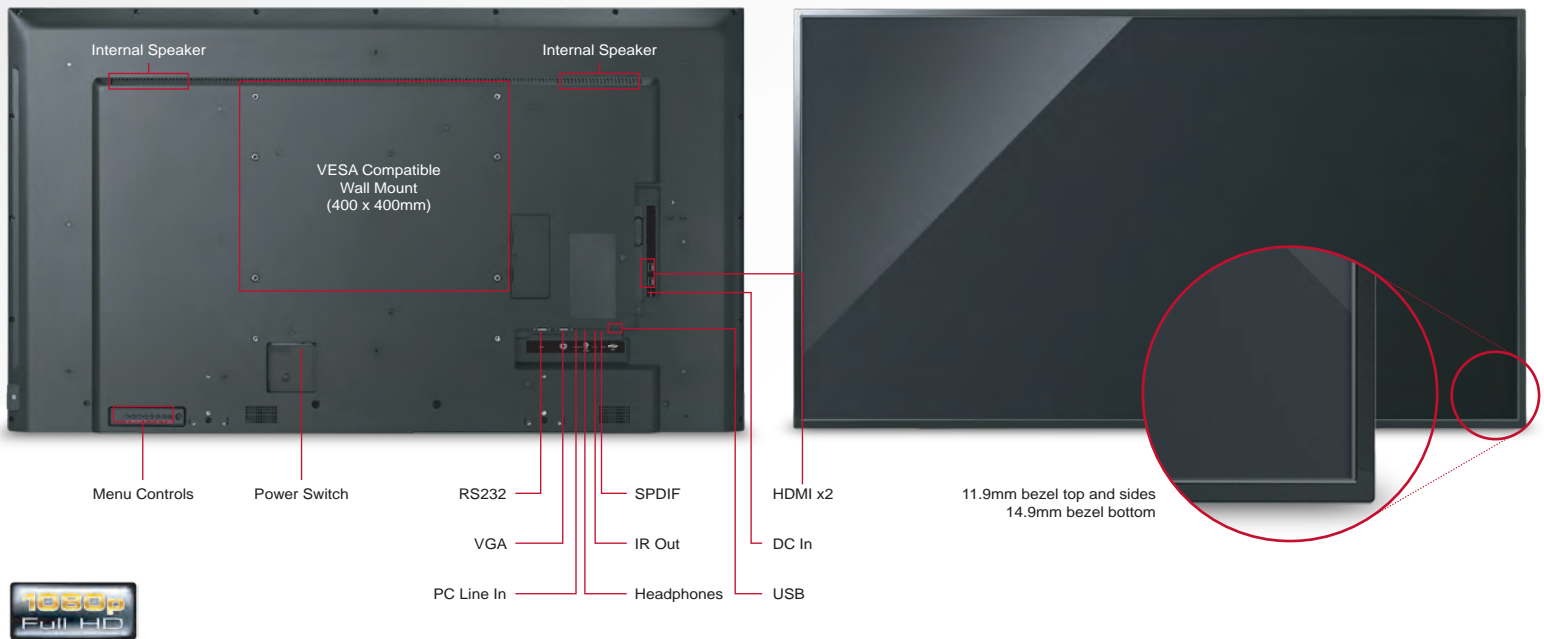

## Specifications

<b>PANEL</b>	Type	VA TFT LCD Module with LED Backlight
	Display Area	37.0" horizontal x 20.8" vertical; 43" diagonal
	Optimum Resolution	1920x1080
	Contrast Ratio	3000:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	6.5ms
	Light Source	Long life, 30,000 hrs. (typ)
	Brightness	350 cd/m <sup>2</sup>
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, hard coating 3H
<b>INPUT</b>	Video Input	HDMI, VGA
	Control Input	RS232, IR In
<b>AUDIO OUTPUT</b>	Speakers	Internal 10-watt (x2)
<b>INPUT SIGNAL</b>	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p
<b>CONNECTOR</b>	Analog	15-pin mini D-sub (VGA x1), PC Audio In (x1), headphone out
	Digital	HDMI (x2), SPDIF, USB, RS232
	Power	5V/2A DC In
<b>CONTROLS</b>	Panel	Power, Mute, Input, Vol +, Vol -, Up, Down, Menu
	Picture	Auto picture, Brightness, Contrast, Color, Advanced settings, Reset picture setting
	Sound	Auto sound, Equalizer, Balance, Reset sound settings
	Clock	Sleep timer, Date/Time
	Features	Language, PC settings, Button lock, Remote lock, Monitor ID, Current software info, Reset AV & features
	USB Menu	Photo, Music, Movie
<b>POWER</b>	Voltage	AC 100–240V (universal), 50 / 60Hz
	Consumption	105W (typ), 125W (max)
<b>OPERATING CONDITIONS</b>	Temperature	32-104°F (0–40°C)
	Humidity	20-80% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	Physical	38.1 x 22.0 x 2.4 in. / 968.2 x 559.4 x 60 mm
	Packaging	42.1 x 27.4 x 6.3 in. / 1070 x 696 x 159 mm
<b>BEZEL DIMENSIONS</b>	Top/Left	11.9 mm / 11.9 mm
	Bottom / Right	14.9 mm / 11.9 mm
<b>WEIGHT</b>	Net	19.2 lbs / 8.7 kg
	Gross	26.9 lbs / 12.2 kg
<b>WALL MOUNT</b>	VESA Compatible	400 x 400 mm / 200 x 200 mm
<b>REGULATIONS</b>		CE, CB, ErP, WEEE, C-tick, cTUVus, FCC, ENERGY STAR, Mexico Energy
<b>RECYCLE/DISPOSAL</b>		Please dispose of in accordance with local, state, or federal laws

## What's in the box?

CDE4302 display, power cable, VGA cable, RS232 cable, remote control with batteries, ViewSonic Wizard CD (User Guide), Quick Start Guide



ViewSonic Corporation's OMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2015 ViewSonic Corporation. All rights reserved.

03232017

[www.hk.viewsonic.com](http://www.hk.viewsonic.com)  
Sales hotline: +852-3690-1398