



MYPODIUM™ ID2456 - 24" TOUCH DISPLAY WITH ACTIVE STYLUS AND ADVANCED ERGONOMICS

Key Features


- Advanced Touch Interactivity and Accurate Handwriting
- USB-C Single Cable Plug-and-Play
- Cross Platform Touch Support
- Palm Rejection Technology
- Advanced Connectivity for Multiple Platforms
- Advanced Ergonomics




24"
DISPLAY



PANEL



RESOLUTION

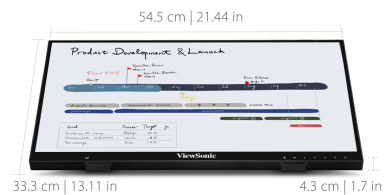

FULL HD 1920x1080p RESOLUTION

Product Description

With responsive PCAP touch technology and an MPP2.0 active stylus, the ViewSonic® myPodium™ ID2456 interactive pen display delivers precise control for more productive workspaces and collaborative classrooms. With high-performance touchscreen, this 24" (23.8" viewable) Full HD display provides smooth and responsive touch and pen tracking, along with amazing screen performance, within a sleek and bezel-less design. USB 3.1 Type-C connectivity offers a single-cable plug-and-play solution for laptops and Chromebooks, while HDMI output enables easy screen mirroring or extended desktops ideal for office productivity and podium applications in classrooms. A magnetic stylus pen with 4096 pressure sensitivity and +/- 50-degree tilt lets you write or draw on screen with precision, and easily attaches to the display bezel for secure storage. So whether used on its own on office desktops, as a collaboration station in corporate huddle spaces, or as a front-of-classroom interactive teaching hub, the myPodium™ ID2456 helps to boost efficiency and productivity.

Specifications

More Information	
UPC	766907015065
Screen Size	24"
Viewable Area (in.)	23.8
Display Resolution	1920 x 1080

Static Contrast Ratio	1,000:1
Light Source	LED
Brightness	250 cd/m2
Colors	16.7M
Aspect Ratio	16:9
Response Time (Typical GTG)	14ms
Viewing Angles	178° horizontal, 178° vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hardness 6H
Refresh Rate	60Hz
USB Type A	2
USB Type B	1
USB Type C	1
3.5mm Audio In	1
3.5mm Audio Out	1
VGA	1
HDMI 1.4 In	1
Touch Technology	Projective Capacitive
Touch Points	10-Point Touch
Internal Speakers	3W (x2)
Consumption (typical)	33
Consumption (max)	36
Voltage	AC 100-240V (universal), 50-60Hz
Stand-by	0.5
Cable Organization	No
Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	10-85%
VESA Compatible	100 x 100 mm
Regulations	cTUVus, FCC, Energy Star 8.0, CEC, CE RoHS, REACH, WEEE, BSMI, NOM or UL Mexico CoC (Addendum), Mexico Energy
Net (lbs)	11
Gross (lbs)	17
Net (kg)	5
Gross (kg)	7.7
Packaging (in.)	23.82" (W) x 4.92" (H) x 15.94" (D)
Physical (in.)	13.11 " (W) x 1.7 " (H) x 21.44 " (D)

Packaging (mm)

605mm (W) x 125mm (H) x 405mm(D)

Physical (mm)

333 mm (W) x 43 mm (H) x 545 mm (D)

Package Contents

ID2456, Power cable (1.8m), Type-C cable (1.8m), HDMI cable (1.8m), USB cable (1.8m), MPP2.0 ACP, Pen tether, Pen tip, Quick Start Guide


Recycle/Disposal

Please dispose of in accordance with local, state or federal laws.

Warranty

Three-year limited warranty on parts, labor and backlight

UPC: 766907015065

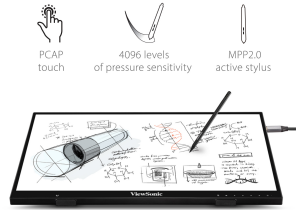

EFFORTLESS PRECISION



REINFORCED DURABILITY
WITH ANTI-GLARE COATING
AND ADJUSTABLE KICKSTAND

Contact Sales

ViewSonic.com

888.881.8781

email:

salesinfo@viewsonic.com