

LS700-4K - 3840 X 2160 RESOLUTION, 3,300 ANSI LUMENS, 1.13~1.47 THROW RATIO


Key Features




60 - 300 in. / 1.5 - 7.6 m
DISPLAY



PANEL



3840 x 2160
RESOLUTION

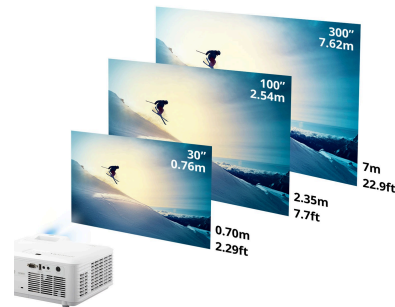

**IMAGE SIZE AND
PROJECTOR DISTANCE**

Product Description


Combining laser technology with 4K Ultra HD resolution and 3,300 lumens of high brightness, the LS700-4K projector delivers a premium home theater experience in any room, day or night. Utilizing the latest laser light technology that lasts up to 20,000 hours*, the LS700-4K delivers long-term enjoyment for movies, games, and other multimedia entertainment. Featuring HDR compatibility, exclusive SuperColor™ technology, and true Ultra HD 3840 x 2160 resolution, the LS700-4K delivers a breathtaking home cinema experience you expect to only get at the movie theater. With high brightness and room-filling sound, this projector provides bright visuals and immersive audio in nearly any room or environment. Set-up is a breeze too: 1.3x optical zoom and versatile connectivity options allow for more flexible mounting and easy installation. For an amazing home theater viewing experience with lifelike color and razor-sharp details, the LS700-4K delivers.

Specifications

UPC	766907007046
Light Source	DLP Laser
Display Resolution	4K (3840x2160)
Display Resolution	3840 x 2160
Brightness (Lumens)	3,300 ANSI
Screen Size	60 - 300 in. / 1.5 - 7.6 m
Throw Distance	4.9 - 28.8 ft / 1.5 - 8.8 m
Throw Ratio	1.13~1.47
Keystone	Vertical (+/- 40°)
Lens	1.3x Manual optical zoom / manual optical focus
Light Source Life, Normal (hours)	20000
Light Source Life, Dynamic Eco-Mode (hours)	20000
Color Depth	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio	3,000,000:1
Aspect Ratio	16:9
Input Lag	37ms
Frequency Horizontal	15K~102KHz
Frequency Vertical	23~120Hz
PC Resolution (max)	3840 x 2160
Mac® Resolution (max)	3840 x 2160
USB 2.0 Type A	1
Ethernet LAN (RJ45)	1
3.5mm Audio Out	1
3.5mm Audio In	1
Control (RS232)	1
HDMI 2.0 (with HDCP 2.2)	2
VGA In	2
VGA Out	1
Composite RCA Video In	1
Mini USB	1
Internal Speakers	2W (x1)
Voltage	100-240V +/- 10%, 50/60Hz AC
Consumption (typical)	260W
Stand-by	<0.5W
Physical Controls	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source

On Screen Display	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	0-90%
Kensington Lock Slot	1
Net (lbs)	15.7
Gross (lbs)	20.1
Net (kg)	7.1
Gross (kg)	9.1
Packaging (in.)	19.7 x 6.2 x 15.8
Physical (in.)	15.6 x 6.2 x 12.4
Packaging (mm)	500.4 x 157.5 x 401.3
Physical (mm)	396.0 x 314.0 x 157.0
Regulations	FCC, cTUVus, ROHS
Package Contents	LS700-4K Projector, Power Cable, VGA Cable, Remote Control, Quick Start Guide
Warranty	*Refurbished. 30-day DOA policy for full refund, with a 90-day repair warranty on parts and labor.
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Classification	Discontinued


UPC: 766907007046



3,500 ANSI LUMENS AND 4K UHD RESOLUTION



SEAMLESS GAMEPLAY
Ultra-fast 4.2ms input with 240Hz refresh rate



EFFORTLESS SETUP

Contact Sales
ViewSonic.com

888.881.8781
email:
salesinfo@viewsonic.com