



VG2756V-2K - 27" 1440P VIDEO CONFERENCE MONITOR WITH WEBCAM, 90W USB C, DOCKING, BUILT-IN GIGABIT ETHERNET

## Key Features

---




27"  
**DISPLAY**



IPS  
**PANEL**



2560 x 1440  
**RESOLUTION**

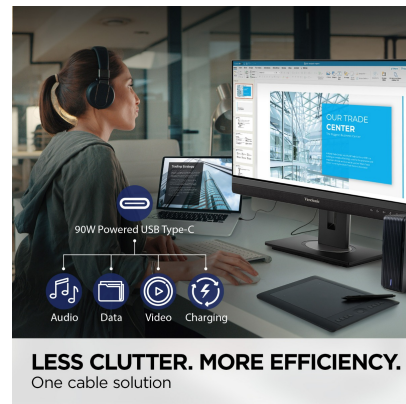

## Product Description

---

The ViewSonic® VG2756V-2K is a 27" docking monitor with premium video conferencing features such as a pop-up webcam, adjustable LED lighting and 1440p resolution to help you look your best when calling into a meeting. Enjoy reliable and flexible network connectivity with the integrated gigabit Ethernet port, while the latest USB-C connectivity makes dual-monitor setup a breeze and provides up to 90W power delivery to your laptop. A best-in-class ergonomic design features 40-degree tilt and bi-directional pivot so your screen and workspace are as comfortable as you need—whether you are working in the office, or from home.

## Specifications


---

[More Information](#)

|                                    |                                              |
|------------------------------------|----------------------------------------------|
| <b>UPC</b>                         | 766907021769                                 |
| <b>Screen Size</b>                 | 27"                                          |
| <b>Viewable Area (in.)</b>         | 27                                           |
| <b>Panel Type</b>                  | IPS                                          |
| <b>Display Resolution</b>          | 2560 x 1440                                  |
| <b>Display Resolution</b>          | QHD (2560x1440)                              |
| <b>Static Contrast Ratio</b>       | 1,000:1                                      |
| <b>Dynamic Contrast Ratio</b>      | 80M:1                                        |
| <b>Light Source</b>                | LED                                          |
| <b>Brightness</b>                  | 350 cd/m2                                    |
| <b>Colors</b>                      | 16.7M                                        |
| <b>Color Space Support</b>         | 8 bit true                                   |
| <b>Aspect Ratio</b>                | 16:9                                         |
| <b>Response Time (Typical GTG)</b> | 5ms                                          |
| <b>Viewing Angles</b>              | 178º horizontal, 178º vertical               |
| <b>Backlight Life (Hours)</b>      | 30,000                                       |
| <b>Panel Surface</b>               | Anti-Glare type, Hard-coating (3H), Haze 25% |
| <b>Flicker-Free</b>                | Yes                                          |
| <b>Blue Light Filter</b>           | Yes                                          |
| <b>PC Resolution (max)</b>         | 2560 x 1440                                  |
| <b>Mac® Resolution (max)</b>       | 2560 x 1440                                  |
| <b>USB Type A</b>                  | 2                                            |
| <b>USB Type B</b>                  | 1                                            |
| <b>USB Type C</b>                  | 1                                            |
| <b>3.5mm Audio Out</b>             | 1                                            |
| <b>Ethernet LAN (RJ45)</b>         | 1                                            |
| <b>HDMI 1.4 In</b>                 | 1                                            |
| <b>DisplayPort</b>                 | 1                                            |
| <b>Internal Speakers</b>           | 5W (x2)                                      |
| <b>Eco Mode (Conserve)</b>         | 141                                          |
| <b>Eco Mode (optimized)</b>        | 144                                          |
| <b>Consumption (typical)</b>       | 148                                          |
| <b>Consumption (max)</b>           | 176                                          |
| <b>Voltage</b>                     | AC 100-240V (universal), 50-60Hz             |
| <b>Stand-by</b>                    | 0.5                                          |
| <b>Power Supply</b>                | Internal                                     |

|                                     |                                                                                                    |
|-------------------------------------|----------------------------------------------------------------------------------------------------|
| <b>Cable Organization</b>           | Yes                                                                                                |
| <b>Headphone Hook</b>               | No                                                                                                 |
| <b>Microphone</b>                   | noise-cancelling microphone array                                                                  |
| <b>Kensington Lock Slot</b>         | 1                                                                                                  |
| <b>Webcam</b>                       | Yes                                                                                                |
| <b>Physical Controls</b>            | Key 1 (audio focus), Key 2, Key 3, Key 4, Key 5, Key 6 (power)                                     |
| <b>On Screen Display</b>            | Input Select, Conference Mode, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu             |
| <b>Temperature</b>                  | 32-104º F (0 - 40º C)                                                                              |
| <b>Humidity (non-condensing)</b>    | 20-90%                                                                                             |
| <b>VESA Compatible</b>              | 100 x 100 mm                                                                                       |
| <b>Frequency Horizontal</b>         | 15 ~ 90 KHz                                                                                        |
| <b>Frequency Vertical</b>           | 49 ~ 75 Hz                                                                                         |
| <b>Height Adjust</b>                | 110 mm / 4.3 in                                                                                    |
| <b>Swivel</b>                       | 60º                                                                                                |
| <b>Pivot (Right/Left)</b>           | 90º / 90º                                                                                          |
| <b>Tilt (Forward/Back)</b>          | 5º / 40º                                                                                           |
| <b>Regulations</b>                  | cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, MX-CoC, Mexico Energy                  |
| <b>Net (lbs)</b>                    | 18.4                                                                                               |
| <b>Net Without Stand (lbs)</b>      | 13.4                                                                                               |
| <b>Gross (lbs)</b>                  | 25.3                                                                                               |
| <b>Net (kg)</b>                     | 8.4                                                                                                |
| <b>Net Without Stand (kg)</b>       | 6.1                                                                                                |
| <b>Gross (kg)</b>                   | 11.5                                                                                               |
| <b>Physical (in.)</b>               | 24.1 " (W) x 16.67~21 " (H) x 8.6 " (D)                                                            |
| <b>Physical Without Stand (in.)</b> | 24.1 " (W) x 15.4 " (H) x 2.2 " (D)                                                                |
| <b>Physical (mm)</b>                | 613 mm (W) x 423.38~533.38 mm (H) x 217 mm (D)                                                     |
| <b>Physical Without Stand (mm)</b>  | 613 mm (W) x 390 mm (H) x 57 mm (D)                                                                |
| <b>Package Contents</b>             | LCD Display, Power Cable, HDMI Cable, USB Type C cable, USB A/B Cable, Quick Start Guide           |
| <b>Recycle/Disposal</b>             | Please dispose of in accordance with local, state or federal laws.                                 |
| <b>Warranty</b>                     | *Refurbished. 30-day DOA policy for full refund, with a 90-day repair warranty on parts and labor. |

UPC: 766907021769



**Contact Sales**  
**[ViewSonic.com](https://www.viewsonic.com)**  
888.881.8781 📞  
email:  
[salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)