



## 136" ALL-IN-ONE DIRECT VIEW LED DISPLAY | LDE136G-152


### Key Features

---


- **INNOVATIVE ALL-IN-ONE DESIGN:** Simplified setup includes everything needed already built into cabinets.
- **OUTSTANDING PRICE-PERFORMANCE:** High-impact dvLED technology that maximizes your investment.
- **GLUE-ON-BOARD TECHNOLOGY:** Protects LEDs from damage and moisture in high-traffic environments.
- **SIMPLIFIED OS:** Streamlines setup, operation, and security.
- **HOT-SWAPPABLE MODULES:** Easy front-serviceable maintenance and includes spare tiles.

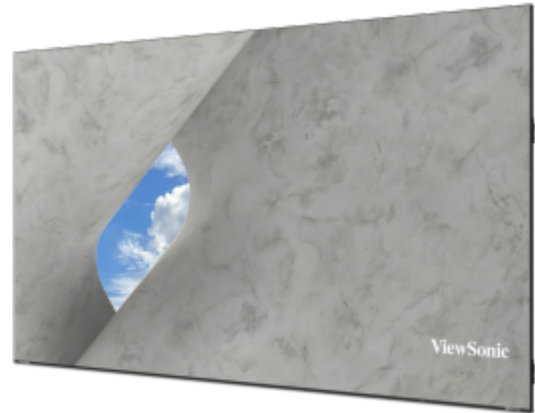

136"  
**DISPLAY**



Direct View LED SMD + Glue-on-Board  
**PANEL**



3840x2160  
**RESOLUTION**



### Product Description

---

The ViewSonic® LDE136G-152 is a 136" all-in-one Direct View LED (dvLED) display. It's part of our LDE Series, designed to deliver outstanding price-performance and simplified dvLED technology. This line is perfect for schools and businesses seeking a high-impact solution that maximizes their investment. The LDE136G-152 features an innovative, fully integrated All-in-One design with a simplified OS. Everything you need is built directly into the cabinets, which allows for easier installation and operation. The complete solution ships together and can be ordered with a single SKU, making setup a breeze. This display is also built to last. It uses durable Glue-on-Board technology with an IP54 dust and moisture rating and an IK06 impact rating. You can confidently use it in busy lobbies, classrooms, or conference rooms. With 600-nit brightness and a 6,500:1 contrast ratio, it delivers a vivid, exceptional viewing experience, representing a premier value in large-format displays.

### Specifications

---

|                                       |                                                                                             |
|---------------------------------------|---------------------------------------------------------------------------------------------|
| <b>UPC</b>                            | 766907038156                                                                                |
| <b>CPU</b>                            | RK3588                                                                                      |
| <b>CPU</b>                            | RK3588                                                                                      |
| <b>Internal Speakers</b>              | 8W (x2)                                                                                     |
| <b>PC Resolution (max)</b>            | 3840x2160                                                                                   |
| <b>Mac® Resolution (max)</b>          | 3840x2160                                                                                   |
| <b>HDMI 2.0 (with HDCP 2.2)</b>       | 1                                                                                           |
| <b>HDMI 1.4 (with HDCP 1.4)</b>       | 1                                                                                           |
| <b>HDMI 1.4 Out (with HDCP 1.4)</b>   | 1                                                                                           |
| <b>3.5mm Audio Out</b>                | 1                                                                                           |
| <b>USB 3.0</b>                        | 2                                                                                           |
| <b>RS232</b>                          | 1                                                                                           |
| <b>Ethernet LAN (RJ45)</b>            | 1                                                                                           |
| <b>Voltage</b>                        | 100-120V/20A ~ 50/60Hz                                                                      |
| <b>Consumption (max)</b>              | 1600W                                                                                       |
| <b>Consumption (typical)</b>          | 533W                                                                                        |
| <b>Stand-by</b>                       | <0.5W                                                                                       |
| <b>On Screen Display</b>              | Yes                                                                                         |
| <b>Remote Control</b>                 | Yes                                                                                         |
| <b>Temperature</b>                    | 32-104º F (0 - 40º C)                                                                       |
| <b>Humidity (non-condensing)</b>      | 20-80%                                                                                      |
| <b>Physical (in.)</b>                 | 118.58 x 67.28 x 2.05                                                                       |
| <b>Physical with Wall Mount (in.)</b> | 118.58 x 67.28 x 2.43                                                                       |
| <b>Physical (mm)</b>                  | 3012 x 1708.9 x 52                                                                          |
| <b>Physical with Wall Mount (mm)</b>  | 3012 x 1708.9 x 61.7                                                                        |
| <b>Package Contents</b>               | Power Cord, LAN Cable, Remote Control, Installation Guide, Wall Mount, LD-MK-004, LD-MK-006 |
| <b>Regulations</b>                    | cTUVus, FCC, RoHS                                                                           |
| <b>Display Type</b>                   | Direct View LED                                                                             |
| <b>Screen Size</b>                    | 136"                                                                                        |
| <b>Light Source</b>                   | DLED                                                                                        |
| <b>LED Pitch Size (mm)</b>            | 1.56                                                                                        |
| <b>LED Grayscale</b>                  | 13 bit                                                                                      |
| <b>Display Resolution</b>             | 1920 x 1080                                                                                 |
| <b>Refresh Rate</b>                   | 3,840Hz                                                                                     |
| <b>Panel Type</b>                     | Direct View LED SMD + Glue-on-Board                                                         |
| <b>Aspect Ratio</b>                   | 16:9                                                                                        |

|                                 |                                |
|---------------------------------|--------------------------------|
| <b>Static Contrast Ratio</b>    | 6,500:1                        |
| <b>Backlight Life (Hours)</b>   | 100,000                        |
| <b>Brightness</b>               | 600-nit                        |
| <b>Viewing Angles</b>           | 170º horizontal, 170º vertical |
| <b>Impact Protection Rating</b> | IK06 (Front)                   |
| <b>Operation Rating</b>         | 24/7                           |
| UPC: 766907038156               |                                |



**Contact Sales**  
[ViewSonic.com](http://ViewSonic.com)

888.881.8781   
email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com) 