

Key Features


27" 100% sRGB Professional Monitor

- > Hardware colour calibration
- > Delta E < 2 colour accuracy
- > Uniformity correction
- > 4K Ultra HD resolution
- > SuperClear® IPS technology



Product Description

Perfect for photographers, designers, videographers, and other creative professionals, the ViewSonic® VP2768-4K Ultra HD monitor delivers unmatched colour accuracy and reliable long-term performance. With a SuperClear® IPS panel and a sleek frameless design, this monitor provides a near-seamless viewing experience ideal for multi-monitor setups. To ensure precise, uniform colour, each of our monitors is factory calibrated to deliver an amazing Delta E<2 value for superior colour accuracy. An integrated colour uniformity function ensures consistent chromaticity across the screen, while a 14-bit 3D look-up table generates a stunningly smooth palette of 4.39 trillion colours. Add to that 6-axis colour adjustment functionality, and this monitor provides the ultimate colour processing capability for professional applications. What's more, an advanced ergonomic design delivers customised comfort for increased productivity. Hardware calibration is also available with compatible calibrators, which allow you to quickly and easily calibrate the monitor for photography, graphic design, content creation, and other colour-critical applications.

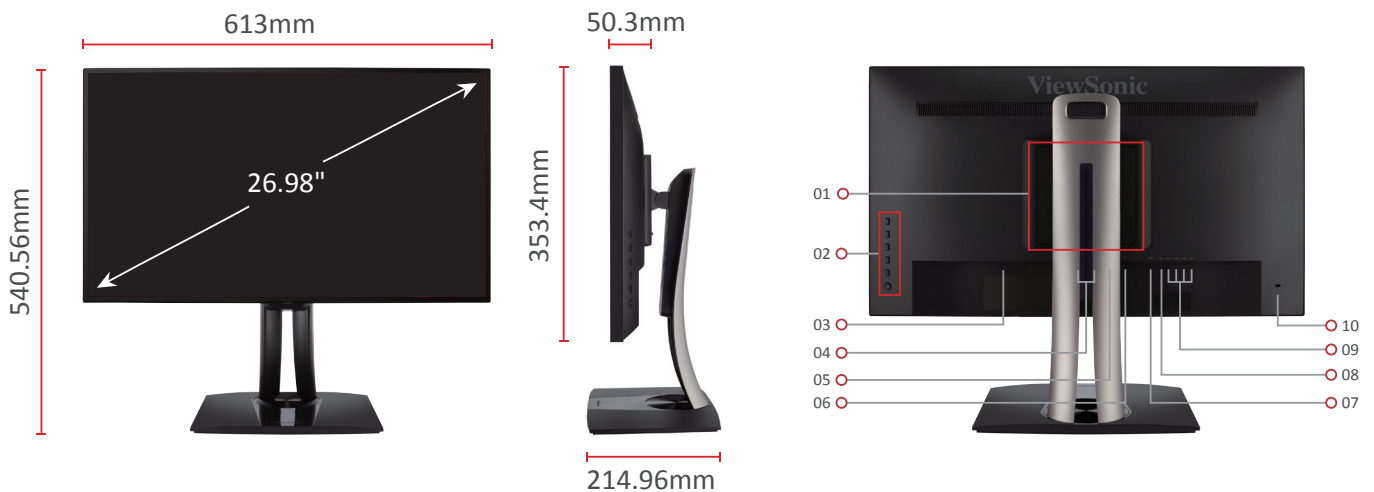

- 01. VESA Compatible
(Wall Mount 100 x 100 mm)
- 02. Menu Controls
- 03. AC In
- 04. HDMI (x2)

- 05. DisplayPort
- 06. Mini DP
- 07. Audio Out
- 08. USB Up Stream

- 09. USB Down Stream (x4)
- 10. Kensington Lock Slot



27"



UHD
3840 x 2160



Hardware
Calibration



Color Accuracy



Auto Pivot



Frameless

LCD PANEL:

Monitor Size:	27"
Panel Technology:	IPS Type, a-si TFT Active Matrix LCD
Resolution:	UHD 3840 x 2160
Display Area:	596.74mm (H) x 335.66mm (V)
Aspect Ratio:	16:9
Brightness:	350 nits (Typ) / 280 nits (min)
Contrast Ratio:	1300:1 (Typ), 910:1 (Min)
Dynamic Contrast Ratio:	20,000,000:1
Viewing Angles:	178 degrees / 178 degrees (Typ)
Response Time:	14ms (Typ)
Colours:	1.07 Billion colors, 10-bit with FRC
Colour Gamut::	NTSC: 75% Coverage / 77.5% Size (Typ)
	sRGB: 99% Coverage / 109% Size (Typ)
	SMPTE-C: 100% Coverage / 118% Size (Typ)
	EBU: 99% Coverage / 108 Size (Typ)
Pixel Size:	0.1554mm (H) x 0.1554mm (V)

INPUT SIGNAL:

Frequency:	HDMI/ DisplayPort/ mini DP: Fh = 15 ~ 136KHz ; Fv = 24 ~ 75Hz
Sync:	HDMI: TMDS DisplayPort/ mini DP: PCI-E

COMPATIBILITY:

PC:	PC Compatibles (3840x2160 HDMI/ DisplayPort Non-Interlaced)
Mac®:	Power Mac (up to 3840x2160 HDMI/ DisplayPort)

CONNECTOR:

Input:	DisplayPort 1.2a x 1 ; Mini DP 1.2a x 1 ; HDMI 2.0 x 2
Output:	3.5mm Mini Phone Jack Audio out (Earphone) x 1

USB:

Upstream:	Type B x 1
Downstream:	Type A x 4

Power:

Power:	3-pin plug AC Socket Type (IEC 60320-1) x1
Voltage:	AC 100-240V (Universal); 1.6 A (MAX) 50/60Hz
Consumption:	46.0W
Optimise:	38.5W
Conserve:	29.0W

ERGONOMICS:

Tilt:	-5.0°±2.0° (forward) , 21.0°±2.0°(backward)
Swivel:	Right 60°±4° / Left 60°±4°
Pivot:	0~90 degrees (Clockwise and Counter Clockwise)
Height Adjustment:	0~130mm ±5.0mm

SPECIAL FEATURES:

6-axis colour adjustment, hardware calibration, auto-pivot
--

WALL MOUNT:

VESA®:	100mm x 100mm
--------	---------------

OPERATING CONDITIONS:

Temperature (° F / ° C):	-4°F to 140°F (-20°C to 60°C)
Humidity:	5% to 90% (no condensation)

DIMENSIONS (W X H X D) (MM):

Physical with stand (mm):	613 mm (W) x 541 mm (H) x 215 mm (D)
Physical without stand (mm):	613mm (W) x 353 mm (H) x 50 mm (D)
Packaging (mm):	720 mm (W) x 268 mm (H) x 460 mm (D)

WEIGHT:

Net with stand:	6.9 kg
Net without stand:	4.2 kg
Gross:	10.1 kg

REGULATIONS:

Global:	CB ,CE, WEEE, RoHS, ErP, REACH, EEL, EAC, UkrSEPRO, cTUVvus, FCC-B, Mexico CoC, Mexico Energy , EPEAT GOLD, Energy Star, CCC, CEL
---------	---

What's In The Box?

LCD Display
Power Cable(cable length :1.8M)
Mini DP to DisplayPort Cable (cable length :1.8M)
USB3.1 Up Stream Cable(cable length :1.8M)
Quick Start Guide
*Actual content may differ from market to market