

# Ultra Portable WXGA LED Projector

Presentations on the Road, or in the Office

**PLED-W600**



The ViewSonic® PLED-W600 is a palm-sized LED projector designed for the mobile user. With a compact lightweight design, this projector delivers bright and detailed images wherever it goes. An MHL-enabled HDMI input offer easy setup and flexible connectivity to high-definition devices, as well as compatibility with wireless HDMI dongles such as Google Chromecast™, Roku® Streaming Stick™, and Amazon Fire TV Stick™. ViewSonic's unique SuperColor™ and SonicMode™ technologies deliver true-to-life colors and enhanced sound for an immersive viewing experience whether on the road or in the office.

## **Key Features:**

Lightweight portable design, short throw lens, and long lamp life

600 ANSI lumens and WXGA 1280x800 native resolution

MHL-enabled HDMI input for connection to compatible mobile and high-definition devices

Powered USB A port (5V/1A) for wireless HDMI dongles such as Google Chromecast, Roku Streaming Stick, and Amazon Fire TV Stick


Project 80" images from 7.8 feet

## **Designed for:**


Business travelers

# Ultra Portable WXGA LED Projector

**PLED-W600**

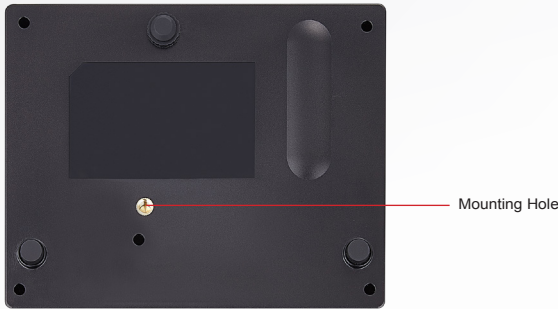

Projection Distance		Screen Size (16:10) Diagonal	
Inches	Meters	Inches	Meters
28.5	0.72	24	0.61
38.0	0.96	32	0.81
47.5	1.21	40	1.02
57.0	1.45	48	1.22
66.5	1.69	56	1.42
76.0	1.93	64	1.63
85.5	2.17	72	1.83
95.0	2.41	80	2.03
118.7	3.02	100	2.54

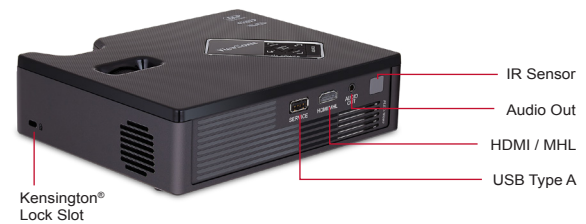

## Specifications

<b>DISPLAY</b>	Type	0.45" Digital Micromirror Device (DLP™)	<b>CONTROLS</b>	Basic	Power, keystone/arrow keys, left/source, menu/exit, right/enter	
	Resolution	WXGA 1280x800 (native)		OSD	Display, Picture, Setting, Options (See user guide for full OSD functionality)	
<b>INPUT SIGNAL</b>	Lens	Fixed zoom / manual optical focus	<b>OPERATING CONDITIONS</b>	Temperature	32–104° F (0–40° C)	
	Keystone	Vertical digital keystone correction (± 40°)		Humidity	10–90% (non-condensing)	
	Size	24 – 100 in. / 0.6 – 2.54 m (diagonal)	Altitude	0–6,000 ft (1,800m), operational up to 10,000 ft (3,048m)		
	Throw Distance	2.3 – 9.9 ft. / 0.7 – 3.02 m	<b>DIMENSIONS (W x H x D)</b>	Physical Packaging	6.89 x 2.03 x 5.43 in. / 175 x 138 x 51.5 mm	
	Throw Ratio	1.4:1			12.9 x 4.25 x 8.39 in. / 328 x 213 x 108 mm	
	Light Source	LED (Red: 25W, Green 55W, Blue 55W)	<b>WEIGHT</b>	Net	1.74 lb. / 0.79 kg	
	Light Life	30,000 hours			Gross	3.66 lb. / 1.66 kg
	Brightness	600 lm	<b>REGULATIONS</b>	<b>WARRANTY</b>	RoHS, REACH, CB, KC, EAC, CE, FCC-B (including ICES003), EAC, NOM, UL /UL-CoC	
	Contrast Ratio	120,000:1 (dynamic mode)			3-year limited warranty on parts, labor, and LED light source, 1st year free Express Exchange® Service*	
	Aspect Ratio	16:10 (native)	<b>OPTIONAL ACCESSORIES</b>	Wireless Presentation Gateway	WPG-series	
Color Depth	30 bits, 1.07B Color (10+10+10)					
<b>COMPATIBILITY</b>	Computer and Video	NTSC M(3.58MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B. D. G. L. L1), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p				
	Frequency	Fh: 31–100KHz, Fv: 50–85Hz				
<b>CONNECTOR</b>	Digital Input	HDMI				
	Audio Output	3.5mm mini jack				
	USB	Type A (service only)				
<b>AUDIO</b>	Speaker	2W x1				
<b>POWER</b>	Voltage	100~240VAC (Auto Switching), 50-60Hz (universal)				
	Consumption	65W (max) / <0.5W (stand-by mode)				

## What's in the box?

PLED-W600 projector, power adapter, power cable, HDMI cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard DVD (with User Guide), soft carry bag



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.