

# LightStream™ XGA 1024x768 Projector

True-to-Life Color in Any Light\*

**PJD5255L**



The ViewSonic® LightStream™ PJD5255L value projector lets you experience true-to-life color in any lighting condition. Whether for classrooms, meeting rooms, or home theaters, ViewSonic LightStream projectors bring lesson plans, presentations, and movies to life with vivid colors and crisp images. Equipped with SuperColor™ technology and a high-brightness output, this projector strikes a perfect balance of color and light to deliver the ultimate in color accuracy without compromise. In addition to incredible screen performance, the PJD5255L projector features a smart and intuitive design that includes a sleek white chassis, a programmable remote control, an easy-access top lamp door, and an optional cable management hood for reduced clutter. Delivering amazing lifelike color at an affordable price, ViewSonic's LightStream PJD5 series of projectors are the ideal multipurpose projection solution for any room.

**Key Features:**

SuperColor™ technology  
delivers superior, richer colors

Up to 3300 ANSI lumens,  
and 20,000:1 contrast ratio

3D Blu-ray ready HDMI input

Choice of 5 view settings  
for a variety of usage scenarios

SonicExpert™ technology delivers enhanced  
sound with an enlarged speaker chamber  
and a powerful amplifier

**Designed for:**

Education



Business

Home

# LightStream™ XGA 1024x768 Projector

**PJD5255L**

Projection Distance		Screen Size (4:3) Diagonal	
Inches	Meters	Inches	Meters
62-69	1.6-1.7	40	1.0
94-103	2.4-2.6	60	1.5
125-137	3.2-3.5	80	2.0
156-172	4.0-4.4	100	2.5
234-257	5.9-6.5	150	3.8
312-343	7.9-8.7	200	5.1
390-429	9.9-10.9	250	6.4

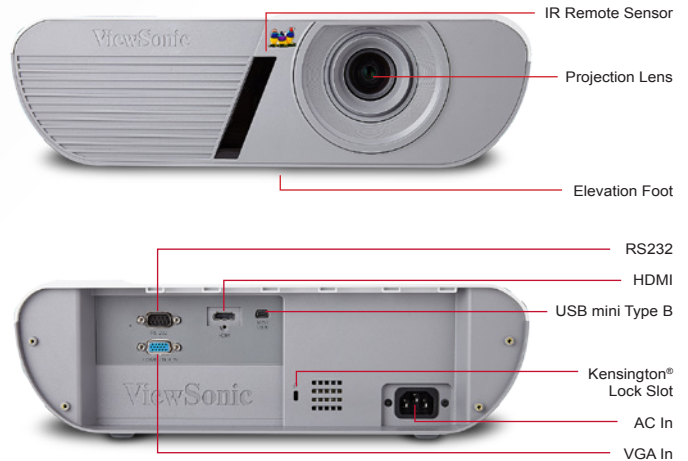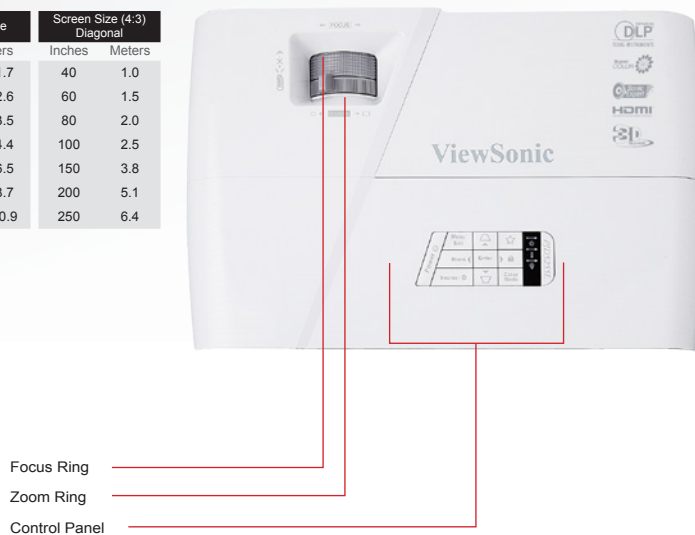

## Specifications

<b>DISPLAY</b>	Type	0.55" Digital Micromirror Device (DLP™)	<b>AUDIO</b>	Speaker	2W (x1)			
	Resolution	1024 x 768 (native)		<b>NOISE LEVEL</b>	Normal/Eco-mode	32 dB / 28 dB		
	Lens	1.1x manual optical zoom / manual optical focus			<b>POWER</b>	Voltage	100~240VAC (Auto Switching), 50-60Hz (universal)	
	Keystone	Manual vertical digital keystone correction (± 40°)		Consumption		265W (max) / <0.5W (stand-by mode)		
	Size	30 – 300 in. / 0.76 – 7.62 m (diagonal)		<b>CONTROLS</b>	Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source		
	Throw Distance	3.9 – 36.1 ft. / 1.2 – 11.0 m				OSD	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality)	
	Throw Ratio	1.95~2.15:1		<b>OPERATING CONDITIONS</b>	Temperature		32~104° F (0~40° C)	
	Lamp	200 watt				Humidity	10~90% (non-condensing)	
	Light Life	4500 / 6000 / 10000 hours** (Normal / Eco-mode / DynamicEco™ Mode)					Altitude	0~6,000 ft (1,800m), operational up to 10,000 ft (3,048m)
	Brightness	3300 lm		<b>DIMENSIONS (W x H x D)</b>	Physical	14.25 x 9.09 x 4.29 in. / 362 x 231 x 109 mm		
Contrast Ratio	20,000:1 (DynamicEco™ Mode)	Packaging	18.31 x 6.50 x 12.40 in. / 465 x 165 x 315 mm					
Aspect Ratio	4:3 (native), 16:9		<b>WEIGHT</b>	Net	5.3 lb. / 2.4 kg			
Color Depth	30 bits, 1.07B Color (10+10+10)	Gross			8.4 lb. / 3.8 kg			
<b>INPUT SIGNAL</b>	Computer and Video	NTSC M(3.58MHz), 4.43MHz, PAL (B, D, G, H, I M, N, 60), SECAM (B, D, G, L, L1), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p	<b>REGULATIONS</b>	CB, UL, cUL, FCC (including ICES-003), CE, UL-Argentina, NOM, TUV-GS, GOST-R, SASO, Ukraine, PSB, C-Tick, Korean-KC, CECP, CCC, WEEE, RoHS				
		Frequency		Fh: 15~100KHz, Fv: 24~120Hz	<b>WARRANTY</b>	3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service***		
<b>COMPATIBILITY</b>	PC	Up to 1600x1200						
	Mac®	Up to 1600x1200 (may require MAC adapter)						
<b>CONNECTOR</b>	Digital Input	HDMI 1.4						
	RGB Input	15-pin mini D-Sub (x1)						
	USB	Mini type B (mouse control and maintenance)						
	Control	RS232						

## Optional Accessories

Wireless Presentation Gateway .....	WPG-370
Wireless Presentation Gateway Dongle .....	WPG-300†
3D Active Shutter Glasses .....	PGD-350
Ceiling Mount Kit .....	WMK-005
Cable Management .....	PJ-CM-004
Carrying Case.....	PJ-CASE-009

## What's in the box?

PJD5255L projector, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

\*Based on normal variance in office/classroom/home lighting conditions. \*\*Lamp life may vary based on actual usage and other factors. \*\*\*One year Express Exchange® service requires product registration. †Requires external USB power source (not included). Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies, DLP® and DLP logo are registered trademarks of Texas Instruments. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Copyright © 2015 ViewSonic Corporation. All rights reserved. [17882-01B-08/15]

www.viewsonic.com