


VP2776T-4K - 27" COLORPRO™ 4K UHD IPS DOCKING MONITOR WITH 100W THUNDERBOLT 4, RJ45, DCI-P3 AND HDR400


Key Features




27"
DISPLAY



IPS
PANEL



3840 x 2160
RESOLUTION

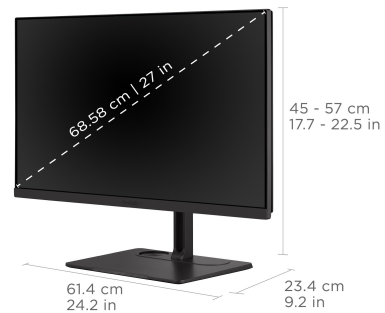

**4K UHD (3840x2160p)
RESOLUTION**

Product Description

The VP2776T-4K ColorPro™ Monitor is a powerhouse for creative professionals, engineers, programmers and more. This 27" Pantone Validated display delivers exceptional 4K visuals, accurate DCI-P3 colors, and HDR400 for deep contrast. Its integrated Thunderbolt 4 docking station offers 100W power delivery, RJ45 Ethernet, and multiple connectivity options such as DisplayPort, HDMI, and a USB hub for a streamlined workspace. With dual 4K daisy chaining via Thunderbolt 4, you can easily expand your display setup for maximum productivity.

Specifications

More Information

UPC

766907031713

Screen Size	27"
Viewable Area (in.)	27
Panel Type	IPS
Display Resolution	3840 x 2160
Display Resolution	4K (3840x2160)
Static Contrast Ratio	2,000:1
Dynamic Contrast Ratio	20M:1
Light Source	LED
Brightness	400 cd/m2
Colors	1.07B
Color Space Support	10 bit (8 bit + FRC)
Aspect Ratio	16:9
Response Time (Typical GTG)	5ms
Viewing Angles	178º horizontal, 178º vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
Refresh Rate	60Hz
PC Resolution (max)	3840 x 2160
Mac® Resolution (max)	3840 x 2160
USB Type A	3
USB Type C	100W x 1, 15W x 1
USB Type C - Downstream	1 (15W)
Mini USB	1
3.5mm Audio Out	1
Ethernet LAN (RJ45)	1
HDMI 2.1 In	2
DisplayPort	1
Thunderbolt 4	2 (1 upstream / 1 downstream)
Internal Speakers	3W (x2)
Eco Mode (Conserve)	221
Eco Mode (optimized)	227
Consumption (typical)	235
Consumption (max)	250
Voltage	DC 24V
Stand-by	0.5
Power Supply	External

Cable Organization	No
Kensington Lock Slot	1
Physical Controls	Joystick key: Up, Right, Down, Left, Center; Power
On Screen Display	Input Select, Color Mode, ViewMode, Audio Adjust, Setup Menu
Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	30 ~ 150 KHz
Frequency Vertical	24 ~ 75 Hz
Height Adjust	120 mm / 4.7 in
Swivel	120º
Pivot (Right/Left)	90º / 90º
Tilt (Forward/Back)	3º / 22º
Regulations	cTUVus, FCC-B ICES003, Energy Star, EPEAT, CEC, NRCan
Net (lbs)	16.8
Net Without Stand (lbs)	9.3
Gross (lbs)	28.9
Net (kg)	7.6
Net Without Stand (kg)	4.2
Gross (kg)	13.1
Packaging (in.)	28.3 x 20.3 x 9
Physical (in.)	24.16 x 17.73 ~ 22.46 x 9.21
Physical Without Stand (in.)	24.16 x 14.32 x 2.20
Packaging (mm)	720 x 515 x 228
Physical (mm)	613.7 x 450.36 ~ 570.36 x 234
Physical Without Stand (mm)	613.7 x 363.85 x 55.8
Package Contents	LCD Display, DisplayPort Cable, HDMI Cable, Thunderbolt4 Cable, USB-C to USB-A Cable, Power Adaptor, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	*Refurbished. 30-day DOA policy for full refund, with a 90-day repair warranty on parts and labor.

UPC: 766907031713



Contact Sales
[ViewSonic.com](https://www.viewsonic.com)
888.881.8781
email: salesinfo@viewsonic.com