




98" OS-FREE COMMERCIAL DISPLAY, 3840 X 2160 RESOLUTION, 500 CD/M2 HIGH BRIGHTNESS, 24/7 OPERATION RATING, HDMIX3, USB-C, 3.5MM AUDIO IN/OUT, AV CONTROL SYSTEM INTEROPERABILITY, LANDSCAPE AND PORTRAIT MODE


## Key Features

---


- **OPTIMIZED FOR VIDEOCONFERENCING:** Clear 4K visuals and reliable performance for smooth, professional meetings.
- **FAST STARTUP:** Boots in seconds so meetings start on time, every time.
- **SIMPLE CONNECTIVITY:** One USB-C cable plus HDMI for quick, easy laptop connections.
- **SEAMLESS AV INTEGRATION:** Certified for Q-SYS, compatible with Crestron, Extron, and AMX.
- **FLEXIBLE INSTALLATION:** Supports portrait or landscape mounting to fit any space.




98"  
**DISPLAY**



VA  
**PANEL**



**RESOLUTION**

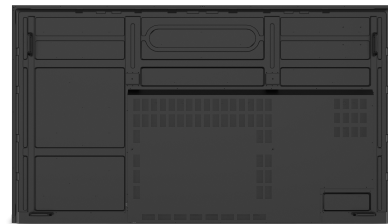

## Product Description

---


The ViewSonic® CDE98G3 is a 98" commercial display designed to make meetings, trainings, and videoconferences fast, simple, and professional. Its 4K UHD resolution ensures crisp visuals for presentations and video calls, while 24/7 commercial-grade reliability keeps it running smoothly in huddle rooms, conference rooms, and executive offices. Booting in as fast as 8 seconds, the CDE98G3 gets your meetings started on time without delays. A single USB-C cable plus HDMI lets you easily connect laptops, share content, and power devices, making setup quick and effortless. Q-SYS certified and compatible with Crestron, Extron, and AMX, it integrates seamlessly into existing AV systems. With no operating system to manage, this OS-free display reduces security risks and IT complexity, giving your team a safer, low-maintenance solution. The impressive 98" size fits perfectly in larger meeting spaces while delivering big-screen impact.

# Specifications

|                           | More Information                                                |
|---------------------------|-----------------------------------------------------------------|
| UPC                       | 766907035698                                                    |
| Media Player Type         | Yes                                                             |
| CPU                       | MTK 3683                                                        |
| Photo                     | JPEG, PNG                                                       |
| Video                     | VP9, HEVC, H.265, MPEG1/2, MPEG4, H.263, H.264, VC1, MJPEG, VP6 |
| Music                     | WMA, MP3, WAV, MPEG, AC3, DTS, PCM, OGG ,FLAC                   |
| HDMI 2.1                  | 480i, 480p,720p,1080i,1080p, 4K@60Hz                            |
| USB-C                     | 480p, 576p, 720p, 1080p, 4K@60Hz                                |
| Internal Speakers         | 10W (x2)                                                        |
| Speaker Position          | Side                                                            |
| HDMI 2.1 In               | 3                                                               |
| VGA                       | 1                                                               |
| 3.5mm Audio In            | 1                                                               |
| 3.5mm Audio Out           | 1                                                               |
| SPDIF Audio Out           | 1                                                               |
| USB 2.0                   | 2                                                               |
| USB Type C                | 1                                                               |
| RS232                     | 1                                                               |
| Ethernet LAN (RJ45)       | 1                                                               |
| Voltage                   | 100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz                 |
| Consumption (max)         | 278.8W                                                          |
| Consumption (typical)     | 192.7W                                                          |
| Stand-by                  | <0.5W                                                           |
| Temperature               | 32-104º F (0 - 40º C)                                           |
| Humidity (non-condensing) | 20-80%                                                          |
| Net (lbs)                 | 145.24                                                          |
| Gross (lbs)               | 180.5                                                           |
| Net (kg)                  | 65.9                                                            |
| Gross (kg)                | 89.1                                                            |
| Packaging (in.)           | 92.04 x 54.6 x 10.92                                            |
| Physical (in.)            | 86.81 x 49.62 x 3.37                                            |
| Packaging (mm)            | 2360.0 x 1400.0 x 280.0                                         |
| Physical (mm)             | 2204.85 x 1260.35 x 85.6                                        |

|                                    |                                                                                                                                                           |
|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>VESA Compatible</b>             | 800 x 400 mm                                                                                                                                              |
| <b>Screw Size</b>                  | M8                                                                                                                                                        |
| <b>AV Control</b>                  | AMX Certified, Extron Certified, Crestron Connected                                                                                                       |
| <b>Warranty</b>                    | Three-year limited warranty on parts, labor and backlight                                                                                                 |
| <b>Recycle/Disposal</b>            | Please dispose of in accordance with local, state or federal laws.                                                                                        |
| <b>Package Contents</b>            | CDE98G3 Commercial Display, Remote control with batteries, Quick Start Guide, Power cable (3m), HDMI Cable (3m), Wall Mount Screws (x4) and RS232 adapter |
| <b>Regulations</b>                 | cTUVus, FCC, Energy Star 8.0, RoHS, Mexico NOM, Mexico Energy                                                                                             |
| <b>Screen Size</b>                 | 98"                                                                                                                                                       |
| <b>Viewable Area (in.)</b>         | 98                                                                                                                                                        |
| <b>Orientation</b>                 | Landscape / Portrait                                                                                                                                      |
| <b>Colors</b>                      | 1.07B                                                                                                                                                     |
| <b>Color Space Support</b>         | 100% sRGB (8 bit + FRC)                                                                                                                                   |
| <b>Light Source</b>                | DLED                                                                                                                                                      |
| <b>Display Resolution</b>          | 3840 x 2160                                                                                                                                               |
| <b>Refresh Rate</b>                | 60Hz                                                                                                                                                      |
| <b>Panel Type</b>                  | VA                                                                                                                                                        |
| <b>Aspect Ratio</b>                | 16:9                                                                                                                                                      |
| <b>Static Contrast Ratio</b>       | 1,200:1                                                                                                                                                   |
| <b>Backlight Life (Hours)</b>      | 50,000                                                                                                                                                    |
| <b>Brightness</b>                  | 500 cd/m2                                                                                                                                                 |
| <b>Response Time (Typical GTG)</b> | 8ms                                                                                                                                                       |
| <b>Bezel Width (in.)</b>           | 0.846                                                                                                                                                     |
| <b>Bezel Width (mm)</b>            | 21.5                                                                                                                                                      |
| <b>Viewing Angles</b>              | 178° horizontal, 178° vertical                                                                                                                            |
| <b>Panel Surface</b>               | Anti-Glare type, Hard-coating (3H), Haze 25%                                                                                                              |
| <b>Operation Rating</b>            | 24/7                                                                                                                                                      |

UPC: 766907035698



## Contact Sales

[ViewSonic.com](http://ViewSonic.com)

888.881.8781

email:

[salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)