


VA2452SM_H2 - 24" DISPLAY, MVA PANEL, 1920 X 1080 RESOLUTION

Key Features


- Two monitors in a single package
- Full HD 1080p resolution
- Stunning color performance & wide-angle viewing
- Flexible connectivity options
- Superior color rendering & intuitive settings

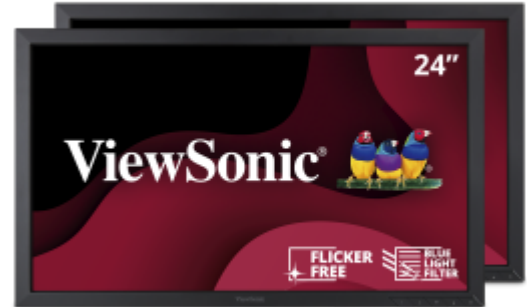

24"
DISPLAY



MVA
PANEL



Up to 1920x1080 non-interlaced
RESOLUTION



Product Description

The dual pack ViewSonic® VA2452Sm_H2 is exclusively designed for corporate users in need of high-performance desktop displays with easy deployment and mounting capabilities. Sold as a dual pack without monitor stands, the VA2452Sm_H2 requires less packaging for a reduced environmental footprint, while still providing VESA compatible mounting for easy installation. With ViewSonic SuperClear® MVA panel technology and 3000:1 static contrast ratio, this monitor delivers an incredible front-of-screen work experience at nearly any viewing angle. Versatile input options include future-proof DisplayPort, as well as DVI and VGA inputs, for productivity-boosting connectivity to PC systems, laptops, and other work devices. ViewSonic's exclusive ViewMode feature provides intuitive presets that deliver optimized screen performance in different applications. In addition, Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods for improved productivity. Lastly, a 3-year limited warranty, along with one of the industry's best pixel performance policies, provides great value for the high-performance VA2452Sm_H2 dual monitor pack.

Specifications

UPC	766907852226
Screen Size	24"
Viewable Area (in.)	23.6
Panel Type	MVA
Display Resolution	1920 x 1080
Static Contrast Ratio	3,000:1
Light Source	LED
Brightness	250 cd/m2
Colors	16.7M
Response Time (Typical GTG)	6.5ms
Viewing Angles	178° horizontal, 178° vertical
Backlight Life (Hours)	40,000
Panel Surface	Anti-glare, hard-coating (3H)
PC Resolution (max)	Up to 1920x1080 non-interlaced
Mac® Resolution (max)	Up to 1920x1080
3.5mm Audio In	1
VGA	1
DVI-D	1
DisplayPort	1
Internal Speakers	1.5-watt (x2)
Eco Mode (Conserve)	15W
Consumption (typical)	23W
Consumption (max)	30W
Voltage	AC 100-240V (universal), 50-60Hz
Cable Organization	No
Kensington Lock Slot	1
Physical Controls	Power, 1, Up, Down, 2
On Screen Display	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall
Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	24~82kHz
Frequency Vertical	50~75Hz
Analog Sync	Separate Sync
Regulations	cTUVus, FCC-B, ICES003, UL-MX-CoC, Mexico Energy, Reach, WEEE

Net Without Stand (lbs)	15.6
Gross (lbs)	19.8
Net Without Stand (kg)	7.1
Gross (kg)	9.0
Packaging (in.)	24.3 x 16.1 x 9.5
Physical Without Stand (in.)	22.2 x 13.2 x 2.0
Packaging (mm)	617 x 409 x 240
Physical Without Stand (mm)	563.0 x 334.9 x 49.6
Package Contents	VA2452Sm monitor (x2) , Power cable, VGA cable, DisplayPort cable, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.

UPC: 766907852226



Contact Sales

ViewSonic.com

888.881.8781 ☎

email:

salesinfo@viewsonic.com