


LD135-151 - 135" DISPLAY, 1920 X 1080 RESOLUTION, 600-NIT BRIGHTNESS, 24/7

## Key Features

---


- All-in-One Solution
- Powerful Embedded SoC Platform
- Multi-Panel Modular Design for Easy Installation
- Vivid Colors and Stunning Images
- AV Control System Compatible

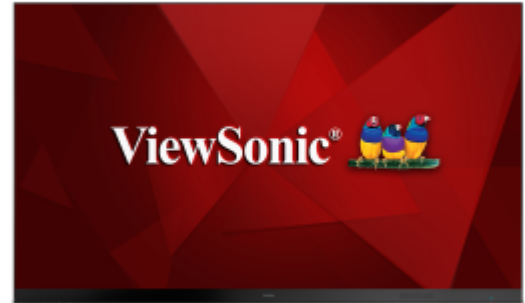

135  
DISPLAY



PANEL



RESOLUTION



## Product Description

---

The ViewSonic® LD135-151 is a premium all-in-one direct view LED commercial display. With a huge 135" screen size, the LD135-151 is built to impress as a centerpiece in any conference room, boardroom, or lobby. Along with its immense screen size, this display delivers stunning visuals with Full HD resolution, 1.5mm fine pixel pitch, 600-nit high brightness, 4,440Hz ultra-fast refresh rate, and 120% Rec.709 wide color gamut.

Integrated ViewBoard® Cast screen sharing software\* (along with optional ViewSonic vCastSender app), enables both on-site and online attendees to participate in video conferences and simultaneously share content. Equipped with twin dual-core processors, 4GB RAM, and 32GB of internal memory, the LD135-151 can play multimedia from internal storage or a USB flash drive 24 hours a day, seven days a week. And with remote configuration and content management system support, the ViewSonic LD135-151 is also suitable for a wide array of diverse signage applications.


\*Chrome, Android, Windows, Mac OS, and iOS compliant

# Specifications

	More Information
<b>UPC</b>	766907008784
<b>OS</b>	Android 8.0
<b>Media Player Type</b>	Yes
<b>GPU</b>	Multi-core MaliG51 MP2
<b>CPU</b>	Hi3751 V811
<b>Memory</b>	4GB DDR4
<b>Storage</b>	32GB (26GB available)
<b>Internal Speakers</b>	5W (x2)
<b>HDMI In</b>	2
<b>HDMI 1.4 Out (with HDCP 1.4)</b>	1
<b>HDMI 1.4 Out</b>	1
<b>3.5mm Audio Out</b>	1
<b>USB 3.0</b>	1
<b>USB 2.0</b>	2
<b>USB 2.0 Type B</b>	1
<b>RS232</b>	1
<b>Ethernet LAN (RJ45)</b>	1
<b>IR in</b>	1
<b>Intel® OPS Slot In (80-pin)</b>	1
<b>Voltage</b>	100-240V+/- 10%, (100-120V/30A, 50/60Hz ; 220-240V/15A)
<b>Consumption (max)</b>	2,900W
<b>Consumption (typical)</b>	2,030W
<b>Stand-by</b>	<0.5W
<b>On Screen Display</b>	Yes
<b>Remote Control</b>	Yes
<b>Temperature</b>	32-104° F (0 - 40° C)
<b>Humidity (non-condensing)</b>	20-80%
<b>Net (lbs)</b>	297.6
<b>Gross (lbs)</b>	529.1
<b>Net (kg)</b>	135.0
<b>Gross (kg)</b>	240.0
<b>Packaging (in.)</b>	70.9 x 29.3 x 33.5
<b>Physical (in.)</b>	118.9 x 71.1 x 1.4

<b>Packaging (mm)</b>	1800 x 745.0 x 850.0
<b>Physical (mm)</b>	3020.9 x 1805.9 x 35.0
<b>AV Control</b>	AMX Certified, Crestron Certified, Extron Certified
<b>Warranty</b>	5-year limited warranty on parts and labor, on-site service
<b>Recycle/Disposal</b>	Please dispose of in accordance with local, state or federal laws.
<b>Package Contents</b>	Power Cord, Remote Control, QSG, Wall-mount x 1, Maintenance Tool (LD-MK-001) x 1, Spare Modules (LED PCB x 2)
<b>Regulations</b>	cTUVus, FCC, RoHS, Mexico CoC, Mexico Energy
<b>Wifi</b>	802.11ac (2.4GHz/5GHz)
<b>Display Type</b>	Direct View LED
<b>Screen Size</b>	135
<b>Viewable Area (in.)</b>	135
<b>Light Source</b>	Fine Pixel Pitch LED
<b>LED Pitch Size (mm)</b>	1.56
<b>LED Grayscale</b>	14 bits
<b>Display Resolution</b>	1920 x 1080
<b>Refresh Rate</b>	4,440Hz
<b>Aspect Ratio</b>	16:9
<b>Static Contrast Ratio</b>	6,000:1
<b>Backlight Life (Hours)</b>	100,000
<b>Brightness</b>	600-nit
<b>Viewing Angles</b>	160° horizontal, 160° vertical
<b>Operation Rating</b>	24/7

UPC: 766907008784



**Contact Sales**  
[ViewSonic.com](http://ViewSonic.com)  
 888.881.8781  
 email:  
[salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)