

LD216-251 - 216" DISPLAY, 1920 X 1080 RESOLUTION, 600-NIT BRIGHTNESS, 24/7

Key Features


- All-in-One Solution
- Powerful Embedded SoC Platform
- Multi-Panel Modular Design for Easy Installation
- Vivid Colors and Stunning Images
- AV Control System Compatible
- Free Viewboard® Cast Content Sharing Software




216
DISPLAY



PANEL



1920x1080
RESOLUTION

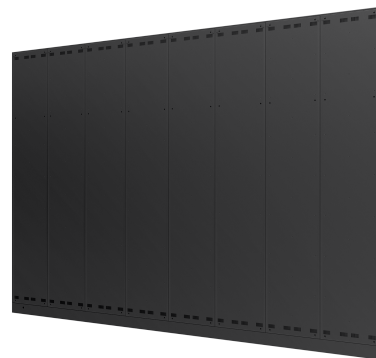

Product Description

The ViewSonic® LD216-251 is a premium all-in-one direct view LED commercial display. With a huge 216" screen size, the LD216-251 is built to impress as a centerpiece in any conference room, boardroom, or lobby. Along with its immense screen size, this display delivers stunning visuals with Full HD resolution, 2.5mm fine pixel pitch, 600-nit high brightness, 4,440Hz ultra-fast refresh rate, and 120% Rec.709 wide color gamut.

Integrated ViewBoard® Cast screen sharing software* (along with optional ViewSonic vCastSender app), enables both on-site and online attendees to participate in video conferences and simultaneously share content. Equipped with twin dual-core processors, 4GB RAM, and 32GB of internal memory, the LD216-251 can play multimedia from internal storage or a USB flash drive 24 hours a day, seven days a week. And with remote configuration and content management system support, the ViewSonic LD216-251 is also suitable for a wide array of diverse signage applications.



*Chrome, Android, Windows, Mac OS, and iOS compliant

Specifications

	More Information
UPC	766907010442
OS	Android 8.0
Media Player Type	Yes
GPU	Multi-core MaliG51 MP2
CPU	Hi3751 V811
Memory	4GB DDR4
Storage	32GB (26GB available)
Internal Speakers	5W (x2)
PC Resolution (max)	1920x1080
Mac® Resolution (max)	1920x1080
HDMI 1.4 In	1
HDMI 1.4 (with HDCP 1.4)	1
HDMI 1.4 Out (with HDCP 1.4)	1
HDMI 1.4 Out	1
3.5mm Audio Out	1
USB 3.0	1
USB 2.0	2
USB 2.0 Type B	1
RS232	1
Ethernet LAN (RJ45)	1
IR in	1
Intel® OPS Slot In (80-pin)	1
Voltage	100-240V +/- 10%, (100-120V/30A, 50/60Hz ; 220-240V/15A)
Consumption (max)	4,900W
Consumption (typical)	3,430W
Stand-by	<0.5W
Temperature	41-104° F (5 - 40° C)
Humidity (non-condensing)	20-80%
Net (lbs)	750.0
Gross (lbs)	992.0
Net (kg)	340.0
Gross (kg)	450.0
Packaging (in.)	109.4 x 40.2 x 33.5

Physical (in.)	189.8 x 110.9 x 1.38
Physical with Wall Mount (in.)	189.8 x 110.9 x 2.2
Packaging (mm)	2780.0 x 1020.0 x 850.0
Physical (mm)	4820.0 x 2818.0 x 35.0
Physical with Wall Mount (mm)	4820.0 x 2818.0 x 56.0
Warranty	3-year limited warranty on parts and labor, on-site service
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Package Contents	Power Cord, Remote Control, QSG, Wall-mount, Maintenance Tool (LD-MK-001), USB Cable (A-to-B), Spart Modules (LED PCB x 2)
Regulations	cTUVus, FCC, RoHS, Mexico CoC, Mexico Energy
Wifi	802.11ac (2.4GHz/5GHz)
Display Type	Direct View LED
Screen Size	216
Viewable Area (in.)	216
Light Source	Fine Pixel Pitch LED
LED Pitch Size (mm)	2.5
LED Grayscale	14 bits
Display Resolution	1920 x 1080
Refresh Rate	4,440Hz
Aspect Ratio	16:9
Static Contrast Ratio	6,000:1
Backlight Life (Hours)	100,000
Brightness	600-nit
Viewing Angles	160° horizontal, 160° vertical
Operation Rating	24/7

UPC: 766907010442



Contact Sales

ViewSonic.com

888.881.8781

email:

salesinfo@viewsonic.com