


#### LDM163-181 - 163" DISPLAY, 1920 X 1080 RESOLUTION, 600-NIT BRIGHTNESS

### Key Features

- High-Impact Messaging
- Simple and Easy Setup
- Amazing Audio-Visual Experience
- Device Management Made Easy
- Easy Maintenance



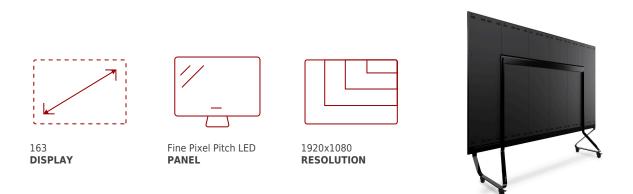

## Product **Description**

The ViewSonic® LDM163-181 is an innovative All-in-One Direct View LED display. With a huge 163" screen size, the LDM163-181 is built to impress as a centerpiece in any conference room, boardroom, or lobby. Along with its immense screen size, this display delivers stunning visuals with Full HD resolution, 1.5mm fine pixel pitch, 600-nit high brightness, 3,840Hz ultra-fast refresh rate, and 120% Rec.709 wide color gamut. What's more, its ultra-slim 35mm thickness and bezel-free design delivers sleek looks whether its hanging on a wall or mounted on an optional aluminum floor stand. Despite its huge screen size, a front-assembly modular design enables easy delivery, installation, and maintenance. And with remote configuration and content management system support, the ViewSonic LDM163-181 is also suitable for a wide array of diverse signage applications.

# Specifications

More Information

UPC	766907014471
Display Type	Direct View LED
Screen Size	163
Viewable Area (in.)	163
Orientation	Landscape
LED Pitch Size (mm)	1.88
LED Grayscale	14 bits
<b>Display Resolution</b>	1920 x 1080
Refresh Rate	3,840Hz
Panel Type	Fine Pixel Pitch LED
Aspect Ratio	16:9
Static Contrast Ratio	6,000:1
Backlight Life (Hours)	100,000
Brightness	600-nit
Viewing Angles	160º horizontal, 160º vertical
Wifi	2.4G / 5G n
OS	Android 8.0
CPU	Hi3751 V811
Memory	4GB DDR4
Storage	32GB (26GB available)
Internal Speakers	5W (x2)
PC Resolution (max)	1920x1080
Mac® Resolution (max)	1920x1080
HDMI 1.4 (with HDCP 1.4)	2
HDMI 1.4 Out (with HDCP 1.4)	1
3.5mm Audio Out	1
USB 3.0	1
USB 2.0	2
RS232	1
Ethernet LAN (RJ45)	1
IR in	1
Intel® OPS Slot In (80-pin)	1
Voltage	100-240V+/- 10%, (100-120V/30A, 50/60Hz ; 220-240V/15A)
Consumption (max)	2660W
Consumption (typical)	1860W
Stand-by	<0.5W

On Screen Display	Yes
Remote Control	Yes
Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-80%
Net (lbs)	423
Gross (lbs)	661
Net (kg)	192
Gross (kg)	300
Packaging (in.)	82.7 x 33.5 x 32.1
Physical (in.)	142.5 x 84.4 x 1.4
Physical with Wall Mount (in.)	142.5 x 84.5 x 2.2
Packaging (mm)	2100 x 850 x 815
Physical (mm)	3620.95 x 2143.45 x 35
Physical with Wall Mount (mm)	3620.95 x 2143.45 x 56
Warranty	3-year limited warranty on parts and labor, on-site service
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Package Contents	Power Cord: x1, USB Cable (A-B): x1, Remote Control: x1, QSG: x1, Wall Mount: x1, Spare Parts: LED PCB Unit x2, Maintenance Tool: LD-MK-001 x1
Regulations	cTUVus, FCC, RoHS
UPC: 766907014471	







#### Contact Sales <u>ViewSonic.com</u> 888.881.8781

email: salesinfo@viewsonic.com