





VG2756V-2K - 27" 1440P VIDEO CONFERENCE MONITOR WITH WEBCAM, 90W USB C, DOCKING, BUILT-IN GIGABIT ETHERNET

Key Features


- 27 Inch QHD (2560x1440p) IPS webcam monitor with thin bezels and 60Hz refresh rate
- Built-in microphone (noise-cancelling), 5W speakers, 1080p camera with privacy shutter and tilt
- Ethernet RJ45 and USB-C connectivity for fast data, audio and video transfer, 90W charging over one cable
- Advanced ergonomics (40-degree tilt, swivel, rotate and height) for all-day comfort
- Flicker-Free technology and Blue Light Filter for reduced eye fatigue
- The VG2756V-2K supports PC, Mac and more with USB-C, RJ45, HDMI, DisplayPort, USB inputs




27"
DISPLAY



IPS
PANEL



2560 x 1440
RESOLUTION

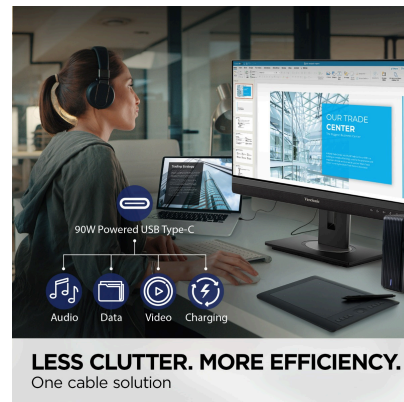


Product Description

The ViewSonic® VG2756V-2K is a 27" docking monitor with premium video conferencing features such as a pop-up webcam, adjustable LED lighting and 1440p resolution to help you look your best when calling into a meeting. Enjoy reliable and flexible network connectivity with the integrated gigabit Ethernet port, while the latest USB-C connectivity makes dual-monitor setup a breeze and provides up to 90W power delivery to your laptop. A best-in-class ergonomic design features 40-degree tilt and bi-directional pivot so your screen and workspace are as comfortable as you need—whether you are working in the office, or from home.

Specifications

UPC	766907018967
Screen Size	27"
Viewable Area (in.)	27
Panel Type	IPS
Display Resolution	2560 x 1440
Display Resolution	QHD (2560x1440)
Static Contrast Ratio	1,000:1
Dynamic Contrast Ratio	80M:1
Light Source	LED
Brightness	350 cd/m2
Colors	16.7M
Color Space Support	8 bit true
Aspect Ratio	16:9
Response Time (Typical GTG)	5ms
Viewing Angles	178º horizontal, 178º vertical
Backlight Life (Hours)	30,000
Panel Surface	Anti-Glare type, Hard-coating (3H), Haze 25%
Flicker-Free	Yes
Blue Light Filter	Yes
PC Resolution (max)	2560 x 1440
Mac® Resolution (max)	2560 x 1440
USB Type A	2
USB Type B	1
USB Type C	1
3.5mm Audio Out	1
Ethernet LAN (RJ45)	1
HDMI 1.4 In	1
DisplayPort	1
Internal Speakers	5W (x2)
Eco Mode (Conserve)	141
Eco Mode (optimized)	144
Consumption (typical)	148
Consumption (max)	176
Voltage	AC 100-240V (universal), 50-60Hz
Stand-by	0.5
Power Supply	Internal

Cable Organization	Yes
Headphone Hook	No
Microphone	noise-cancelling microphone array
Kensington Lock Slot	1
Webcam	Yes
Physical Controls	Key 1 (audio focus), Key 2, Key 3, Key 4, Key 5, Key 6 (power)
On Screen Display	Input Select, Conference Mode, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu
Temperature	32-104º F (0 - 40º C)
Humidity (non-condensing)	20-90%
VESA Compatible	100 x 100 mm
Frequency Horizontal	15 ~ 90 KHz
Frequency Vertical	49 ~ 75 Hz
Height Adjust	110 mm / 4.3 in
Swivel	60º
Pivot (Right/Left)	90º / 90º
Tilt (Forward/Back)	5º / 40º
Regulations	cTUVus, FCC-B, ICES003, Energy Star 8.0, EPEAT Silver, CEC, MX-CoC, Mexico Energy
Net (lbs)	18.4
Net Without Stand (lbs)	13.4
Gross (lbs)	25.3
Net (kg)	8.4
Net Without Stand (kg)	6.1
Gross (kg)	11.5
Physical (in.)	24.1 " (W) x 16.67~21 " (H) x 8.6 " (D)
Physical Without Stand (in.)	24.1 " (W) x 15.4 " (H) x 2.2 " (D)
Physical (mm)	613 mm (W) x 423.38~533.38 mm (H) x 217 mm (D)
Physical Without Stand (mm)	613 mm (W) x 390 mm (H) x 57 mm (D)
Package Contents	LCD Display, Power Cable, HDMI Cable, USB Type C cable, USB A/B Cable, Quick Start Guide
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Warranty	Three-year limited warranty on parts, labor and backlight
UPC: 766907018967	



Contact Sales

[ViewSonic.com](https://www.viewsonic.com)

888.881.8781 📞

email:

salesinfo@viewsonic.com