




LDP216-251 - 216" ALL-IN-ONE PREMIUM FULL HD DIRECT VIEW LED DISPLAY

Key Features


- Seamlessly Immersive
- Versatile Installation Orientation
- Super-Sized Video Walls
- Amazing Visuals
- Theater-Level Audio
- Simple and Easy Setup
- Peace of Mind
- Device Management Made Easy
- Wireless Content Sharing
- Easy Maintenance

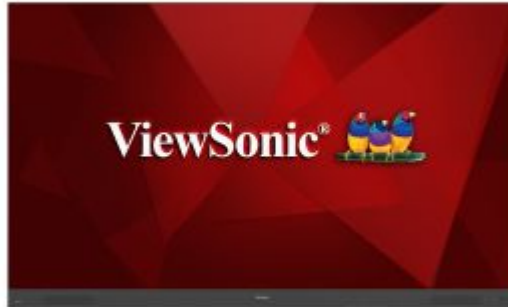


216
DISPLAY



Fine Pixel Pitch LED
PANEL



1920x1080
RESOLUTION

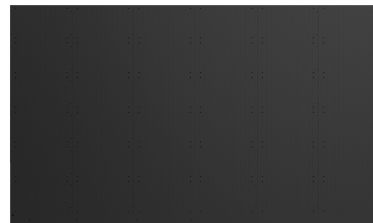

Product Description



The ViewSonic® LDP216-251 All-in-One Direct View LED Display is a premium 216" larger-than-life digital screen that delivers an incredible audio-visual experience for any high-end corporate lobby, boardroom or conference room. Featuring a 120% Rec. 709 wide color gamut, lightning-fast 3,840Hz refresh rate, and a peak brightness of 600 nits, this display delivers true-to-life color and extraordinary detail for every video, presentation and lecture. The display is also equipped with Harman Kardon speakers, 4K/HDR/HLG support and PIP/PBP display modes for immersive content delivery. At 25mm slim and lined with a 5mm frameless edge, the sleek LDP216-251 exudes sophistication and elegance in any modern setting.

Specifications

UPC	766907014976
Display Type	Direct View LED
Screen Size	216
Viewable Area (in.)	216
Light Source	Fine Pixel Pitch LED
LED Pitch Size (mm)	2.5
LED Grayscale	14 bits
Display Resolution	1920 x 1080
Refresh Rate	4,440Hz
Panel Type	Fine Pixel Pitch LED
Aspect Ratio	16:9
Static Contrast Ratio	6,000:1
Backlight Life (Hours)	100,000
Brightness	600-nit
Viewing Angles	160º horizontal, 160º vertical
Operation Rating	24/7
Wifi	2.4G / 5G n
OS	Android 9.0
Media Player Type	Yes
CPU	MTK9669
Memory	4GB DDR4
Storage	64GB (56GB available)
Internal Speakers	20W (x2)
PC Resolution (max)	1920x1080
Mac® Resolution (max)	1920x1080
HDMI 1.4 In	2
HDMI 2.0 In	3
HDMI 2.1 In	1
HDMI 2.0 Out	2
3.5mm Audio In	1
3.5mm Audio Out	1
USB 2.0	3
RS232	1
Ethernet LAN (RJ45)	1
HDBaseT	1
IR in	1

Intel® OPS Slot In (80-pin)	1
Voltage	100-120V/30A~ 50/60Hz or 220-240V/15A~ 50Hz(vary by country)
Consumption (max)	4900W
Consumption (typical)	3430W
Stand-by	<0.5W
On Screen Display	Yes
Remote Control	Yes
Temperature	32-104° F (0 - 40° C)
Humidity (non-condensing)	20-80%
Net (lbs)	640
Gross (lbs)	883
Net (kg)	290
Gross (kg)	400
Packaging (in.)	109.4 x 27.95 x 37
Physical (in.)	189.4 x 111 x 1
Physical with Wall Mount (in.)	189.4 x 111 x 2.2
Packaging (mm)	2780 x 710 x 940
Physical (mm)	4810 x 2820 x 25
Physical with Wall Mount (mm)	4810 x 2820 x 57
Warranty	5-year limited warranty on parts and labor, on-site service
Recycle/Disposal	Please dispose of in accordance with local, state or federal laws.
Package Contents	Power Cord x 2, Remote Control x1, QSG x1, Maintenance Tool (LD-MK-001) x 1, LAN Cable (Cat 5A) x 1, IR Extender Cable x 1, Spart Modules (LED PCB x 7), Wall Mount x 1
Regulations	cTUVus, FCC, RoHS

UPC: 766907014976



Contact Sales

[ViewSonic.com](https://www.viewsonic.com)

888.881.8781

email:

salesinfo@viewsonic.com