

EP4602r

46" DIGITAL SIGN BOARD

Impactful High-Definition Digital Poster

ViewSonic's new ePoster products make it easy to replace those old backlit printed signs with new impactful high-definition digital posters. These sleek new displays feature built-in memory for storing high impact graphics as well as a powerful management tool featuring a content scheduler, duration timer and special effects editor for image transitions. Retail messaging is easy with ViewSonic's new ePoster family of retail displays. Information is disseminated through the ePoster's internal network connection or locally via the USB port. ViewSonic's new ePoster products are available in various sizes and models and can be free standing or wall mounted. Great for announcing special promotions, computer-generated information or communicating multimedia with photos, audio, signage, and video.





- > **46" Full HD 1920x1080 display resolution**
- > **450 nits of brightness with 4,000:1 contrast ratio**
- > **Embedded media player**
Supports HD photos (JPEG, BMP), music (MPEG1) and text
- > **ePoster Manager Express**
Content scheduling and management software – MS Windows compatible
- > **2GB CF memory**
Allows for thousands of images, hundreds of video clips with music
- > **Easy loading of content through USB or Network (RJ45) Ethernet**
- > **Built in 5Wx2 audio**

ViewSonic®
See the difference® 

EP4602r 46" DIGITAL SIGN BOARD




DISPLAY	Diagonal	46" (116.8 cm)
	Resolution	1920x1080 dots
	Color	Over 16.7M color (depending on video card used)
	Brightness	450 cd/m ² (typ)
	Contrast Ratio	4000:1 (typ)
	Response Time	8ms (typ gray-to-gray)
CONNECTIVITY	Ethernet	RJ45 (10/100M)
	Storage	2GB Compact Flash
	USB	1.1 (x1)
FILE FORMATS	Music	LPCM, sampling rate: 32-48KHZ/16-24 bit MPEG1 Layer 3, sampling rate: 32-48KHZ, bit rate: 32-320Kbps
	Photo	JPEG baseline 5120x3840, progressive 2048x1536 BMP
	AUDIO	Speakers
CONTENT MANAGEMENT	Software	ePoster Manager Express
POWER	Operating System	MS Windows
	Supply	3.2-1.38 A @ 100-240VAC, 50/60Hz
	Consumption	Max 240W Save Off < 1W
OPERATING CONDITIONS	Temperature	32-104° F (0-40° C)
	Humidity	20-90% (non-condensing)
STORAGE	Temperature	-4-140° F (-20-60° C)
ENVIRONMENT	Humidity	10-90% (non-condensing)
DIMENSIONS (WxHxD)	Physical with Stand	27.8" x 67.0" x 17.1" (706mm x 1700mm x 450mm)
	Physical without Stand	31.6" x 75.2" x 5.0" (706mm x 1660mm x 128mm)
WEIGHT	Net	264.55 lbs. (120 kg)
	Gross	286.60 lbs. (130 kg)
WALL MOUNT		N/A - Freestanding
REGULATIONS		FCC, ICES 003, CE
MTBF		50,000 hrs.
PACKAGE CONTENTS		ePoster, power cord, remote control with batteries, key, Quick Start Guide, User Manual and Software on CD

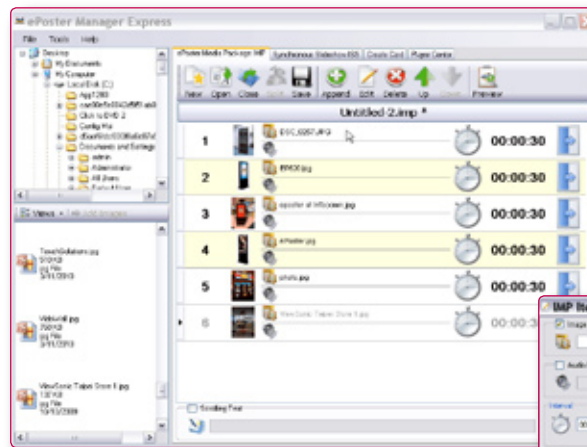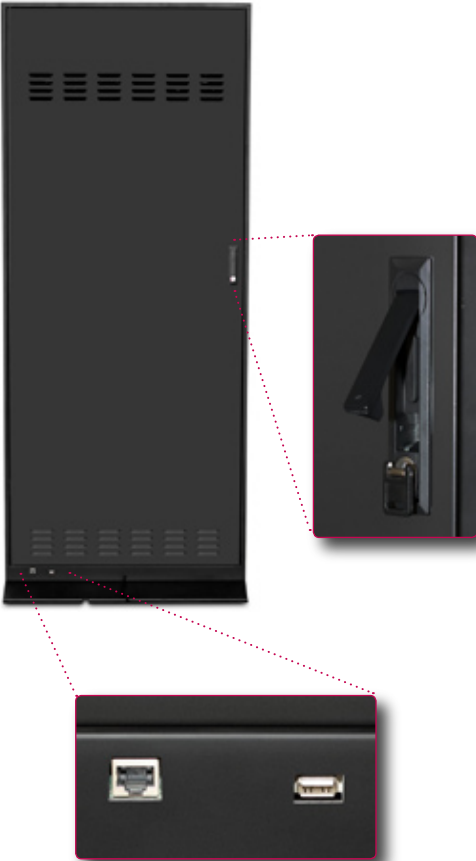

Powerful ePoster Manager Express

Software supports program editing, scheduling, uploading and status monitoring.

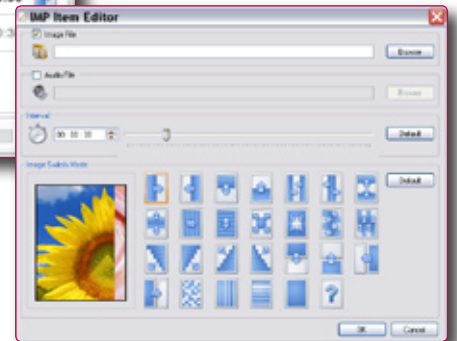

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

Sales: (888) 881-8781 • SalesInfo@ViewSonic.com • ViewSonic.com

Microsoft, Windows, and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2010 ViewSonic Corporation. All rights reserved. [14951-00B-04/10] EP4602r-1

ViewSonic
See the difference



For more product information, visit us on the web at ViewSonic.com