

Twice the Impact – Dual-Sided ePoster

In-store digital signage is easy with ViewSonic's new dual screen ePoster display solution. Vivid retail messaging is easy by connecting your PC or adding your network media player to the industry standard input connections: HDMI, VGA, YPbPr, USB or composite video (A/V). Each screen can be driven separately with its own content. ViewSonic's ePoster display can easily be connected to a corporate network by adding a network media player. Security is achieved through the locking back cover. Compatible ViewSonic® media players are available in both X86 and RISC (Linux) configurations.



- > Dual screen 46" full HD ePoster featuring 1920x1080 resolution and tempered glass faceplate for screen protection
- All-in-One design provides easy customer deployment with no required construction
- Dual internal RISC media players with memory card for playing JPEG images and digital video files
- > Built-in AC power outlet and mounting cradle for adding your own media players
- Automated power on/off provides easy scheduling of operation
- > 5W (x2) internal audio for playing digital audio files
- > Applications:

RETAIL ADVERTISING TRANSPORTATION HOSPITALITY EDUCATION



EP4646 46" DUAL SCREEN DIGITAL SIGN BOARD




DUAL DISPLAY	Diagonal	46" (116.8 cm)
	Resolution	1920x1080 pixel resolution
	Color	Over 16.7M color (depending on video card used)
	Brightness	450 cd/m² (typ)
	Contrast Ratio	4000:1 (typ)
	Response Time	8ms (typ gray-to-gray)
	View Angle	Up and down 178°, left and right 178° (typ) @ CR>10
CONNECTIVITY		HDMI, VGA, YPbPr, USB (x2), A/V, RJ45 Pigtail
INTERNAL	Storage	4GB
	Dual Media	Video: MPEG 1/2/3, H.264, Xvid 1.00-AVI, MP4
	Players	Photo: JPEG
	Support	Audio: WMA, MP3, M4A (AA CC)
		Clock and timer
AUDIO	Speakers	5W (x2)
POWER	Supply	3.2-1.38 A @ 100-240VAC, 50/60Hz
	Consumption	520W (max)
	Save	Off < 1W
OPERATING	Temperature	32-104° F (0-40° C)
CONDITIONS	Humidity	20-90% (non-condensing)
STORAGE	Temperature	-4-140° F (-20-60° C)
ENVIRONMENT	Humidity	10–90% (non-condensing)
DIMENSIONS (WxHxD)) Physical	27.75" x 76.77" x 18.31" (705mm x 1950mm x 465mm)
WEIGHT	Net	292.3 lbs. (132.6 kg)
	Gross	330 lbs. (149.7 kg)
REGULATIONS		FCC, ICES 003, CE
MTBF		50,000 hrs.
PACKAGE CONTENTS		ePoster, power cord, remote control with batteries, key, Quick Start Guide, User Manual and Software on CD
WARRANTY		1-year limited warranty with extended options available







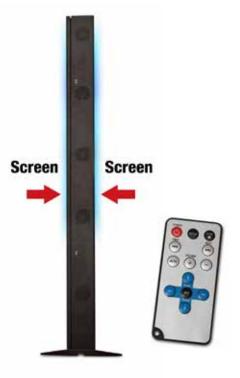



Sales: (888) 881-8781 • SalesInfo@ViewSonic.com • ViewSonic.com

Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of

