


An ideal pen display solution for optimizing user experience with streamlined service



PD1233

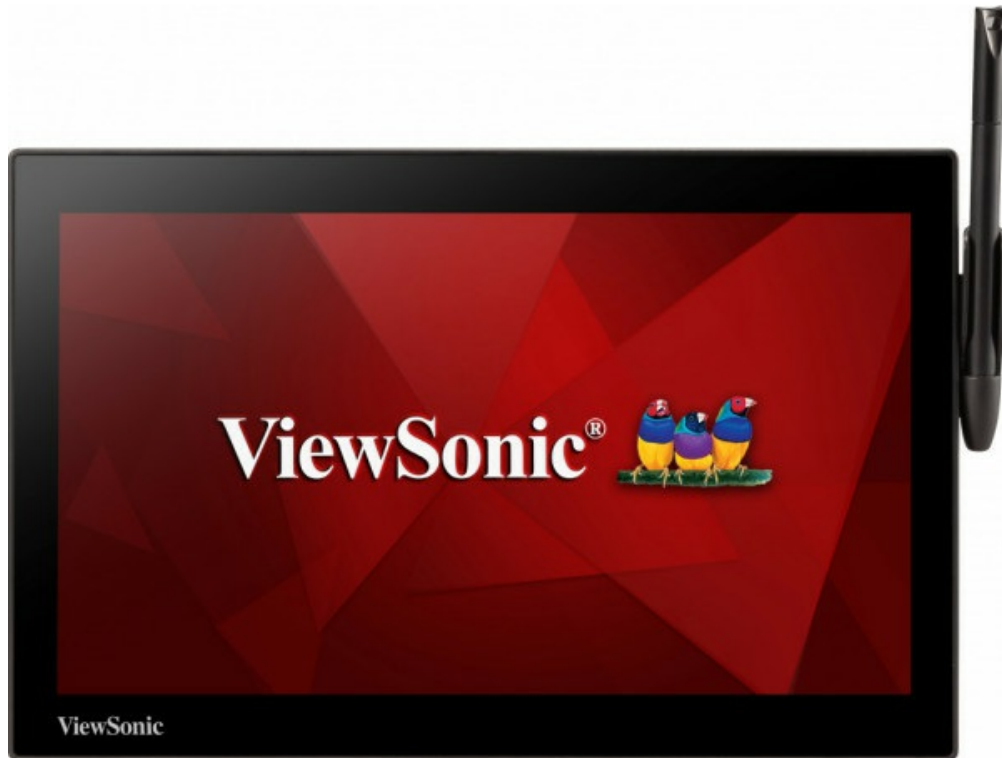

- Implemented antimicrobial technology on pen and housing
- High Performance and e-Signature precision with 2048 pen pressure
- Design portrait and landscape mode for comfortable working
- Ergonomic design, VESA-compliance, and Kensington lock security
- Windows® compatible and support e-Signature software
- 8H glass with anti-scratch, anti-glare, and anti-fingerprint

ViewSonic PD1233 is an ideal solution for optimizing user experience with streamlined service via Kiosk solution. 11.6 -inch LCD colour pen display offers intuitive writing, annotating, and signage capabilities for organizations that need to let use in portrait and landscape mode, making it easier for the user to view and signed documents. It's an ideal e-Signature solution for corporate, banking, finance, hospitality, insurance, and healthcare

A verified 99.9% antimicrobial solution

A verified 99.9 % antibacterial solution have been tested by SGS. Antibacterial technology implemented across all aspects of our product line including the pen, housing. *Option by request



A superior and intuitive handwriting experience

ViewSonic pen display delivers intuitive and accurate handwriting with 2048 levels of pen pressure sensitivity. The 250 pps response rate produces written text and highlighting on the screen without delays.



**2048 Levels
of Pen Pressure**



Battery-free Pen

Ergonomic design for comfortable working

PD1233 can be displayed in portrait and landscape mode, making it easier for the user to view and signed documents.



Outstanding durability surface

Constructed with an edge-to-edge 8H protective glass faceplate, the ViewSonic pen display is anti-scratch, anti-glare, and anti-fingerprint coating, delivering a durable and reliable user touch experience for e-signature solution in public usages.



Secured Encryption

Each signature signed on the pen display undergoes a hardware and software based encryption. All data is protected according to RSA2048 & AES256, the highest industry standards. *Option by request



Support for virtualized environment

ViewSonic pen display offers several options for virtualized, remote desktop, Citrix, VMWare, and RDS and thin client / zero client environments.



Technical Specifications

LCD PANEL	Display Area	256.32 x 144.18 mm (11.6" TFT LCD)
	Optimum Resolution	1920 x 1080 pixels
	Brightness	200 cd/m2
	Contrast Ratio	1000:1
	Backlight	LED Light-Bar
	Viewing Angles	H:178° (89°/ 89°) V:178° (89°/ 89°)
CONNECTOR	Video	Mini HDMI (1.4)
	USB	USB2.0 by 3 IN 1 cable
	Power	Adapter : 5V/2A by 3 IN 1 cable
TOUCH	Technology	EMP Technology
	Digitizer Resolution	5080 LPI
	Writing Response	250 PPS
	Accuracy	+/- 0.5mm(center)
	Pressure Level	2048 levels
ERGONOMICS	Tilt	Portrait : 0/ 15°/ 20°, Landscape: 0/ 9°/ 13°
COMPATIBILITY	PC	Windows 7,8,10
POWER	Voltage	USB 5V
	Consumption	7.26W (Typ.) / 8.06W (Max.)
OPERATING CONDITIONS	Temperature (° F / ° C)	0°C to 50°C
	Humidity	20%-80%(Max), Non-Condensation
DIMENSIONS W x H x D	Physical (in / mm)	287.0 X 185.6 X 14.3 mm

(inch/mm)	Box (in / mm)	350.0 X 274.0 X 76.0 mm
WEIGHT	Net (lb / kg)	0.7 kg
	Gross (lb / kg)	1.28 kg
REGULATIONS		CE, FCC
WARRANTY		1 Year
WHAT'S IN THE BOX		1. Pen Display x 1, 2. Power Adapter x 1, 3. Mini HDMI 3 IN 1 cable x 1, 4. Pen x 1, 5. Pen rope x 1, 6. Pen tip x 3, 7. Replacement Tool of Pen Tip x 1, 8. Quick Start Guide x 1