

# 4,000 ANSI Lumens XGA Business/Education Projector

PG707X



- 4,000 ANSI Lumens offering bright images in any environment
- Larger screen size with lower cost-per-inch
- Throw ratio match & 1.3x zoom for hassle-free equipment upgrade
- Energy-efficient 20,000 hours lamp life
- Comprehensive LAN control for efficient management
- H/V Keystone adjustment enabling side projection

ViewSonic PG707X is a practical 4,000 ANSI Lumens XGA business/education projector. With a throw ratio match for mainstream installation conditions and 1.3x optical zoom, it serves as a hassle-free upgrade choice for users to easily get bright and large images with low cost-per-inch in small-to-medium meeting/training rooms. Adding on to that are the energy-efficient 20,000 hours long lamp life and comprehensive LAN control compatibility, making it even more favorable to cost-effective and efficient management.

## Bright Images in Business/Education Environments

Packed with 4,000 ANSI Lumens and a 22,000:1 contrast ratio, this projector can deliver bright and detailed images.

**4,000 ANSI Lumens**



## Larger Screen Size with Lower Cost-per-inch

The projector allows for an up-to-300" image size, which is much larger and also easier to install than commercial displays.



Commercial Display




PG707X

## Hassle-free Equipment Upgrade

With a throw ratio matching mainstream installation conditions, the projector can be fitted to an existing ceiling mount and projection screen without changing the setup completely.

**1.51-1.97 throw ratio**

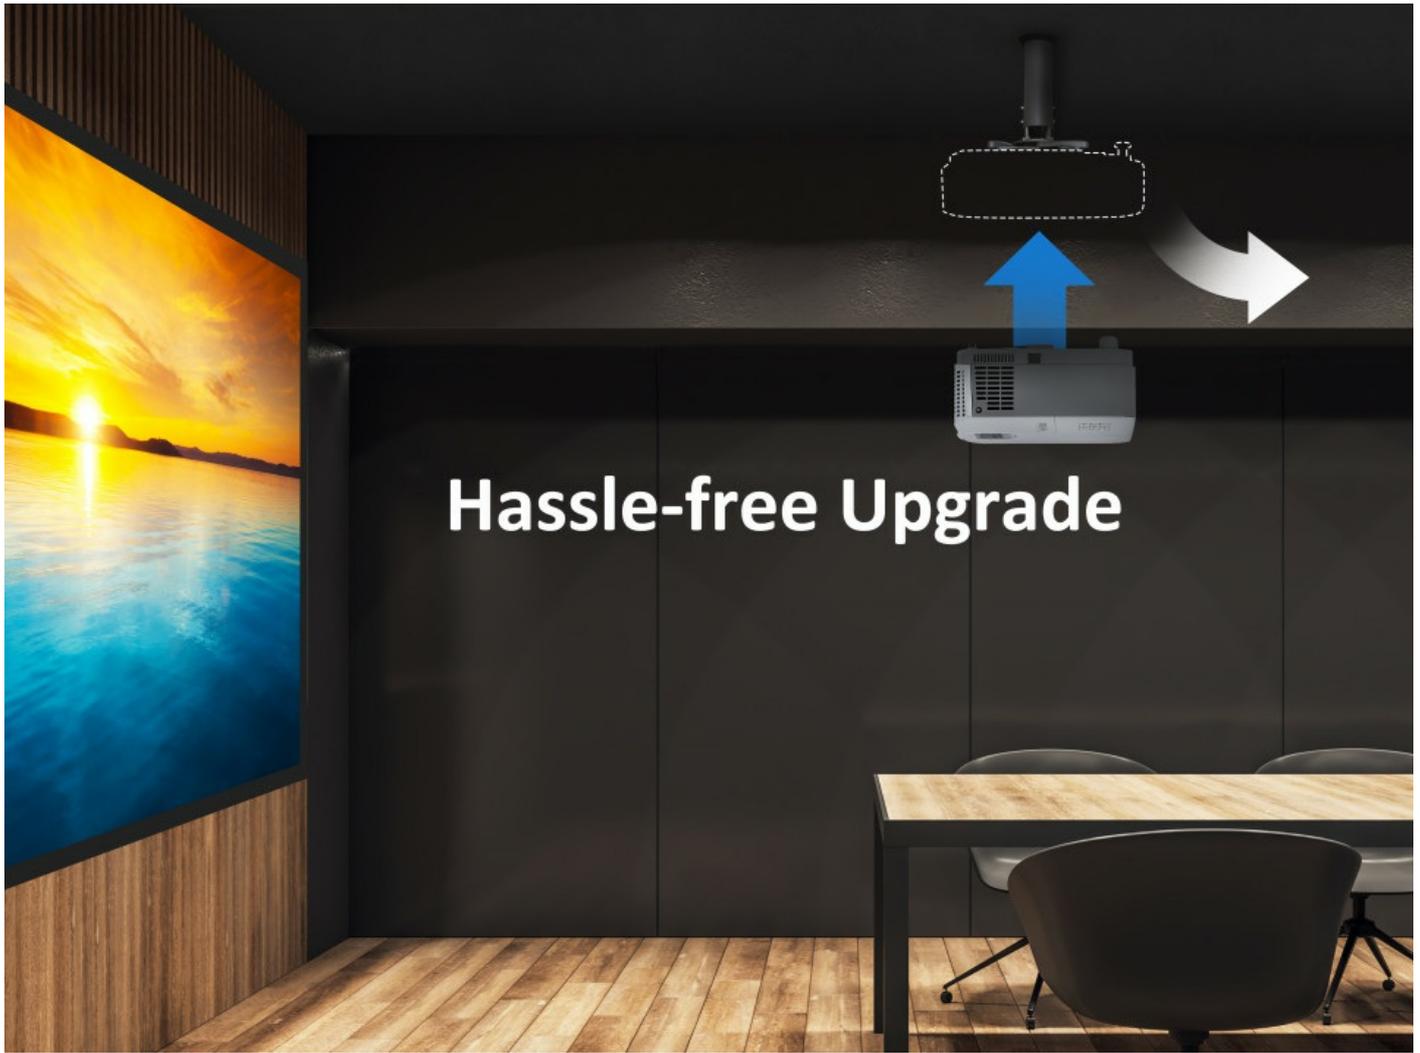

**Adaptable to Any Environment**

Equipped with a 1.3x optical zoom lens, the projector empowers users to choose the most ideal set-up location within a wider throw distance range that doesn't interfere with existing interior design while still getting the desired image size.

**1.3x Optical Zoom**



## Reliable Long-term Performance

The latest SuperEco+ mode technology greatly extends the lamp life of the projector from 15,000 hours to 20,000 hours – meaning 4 hours a day for more than 13 years – saving you maintenance cost and effort.



## Centralized Control for Management Efficiency


This projector comes equipped with Crestron, AMX, Extron and ViewSonic vController, an easy-to-use network management tool.

# 256 Projectors



## Easy Image Adjustment

Horizontal and Vertical Keystone correction along with 4 corner adjustment features eliminate crooked or distorted images for a perfectly proportioned picture every time.

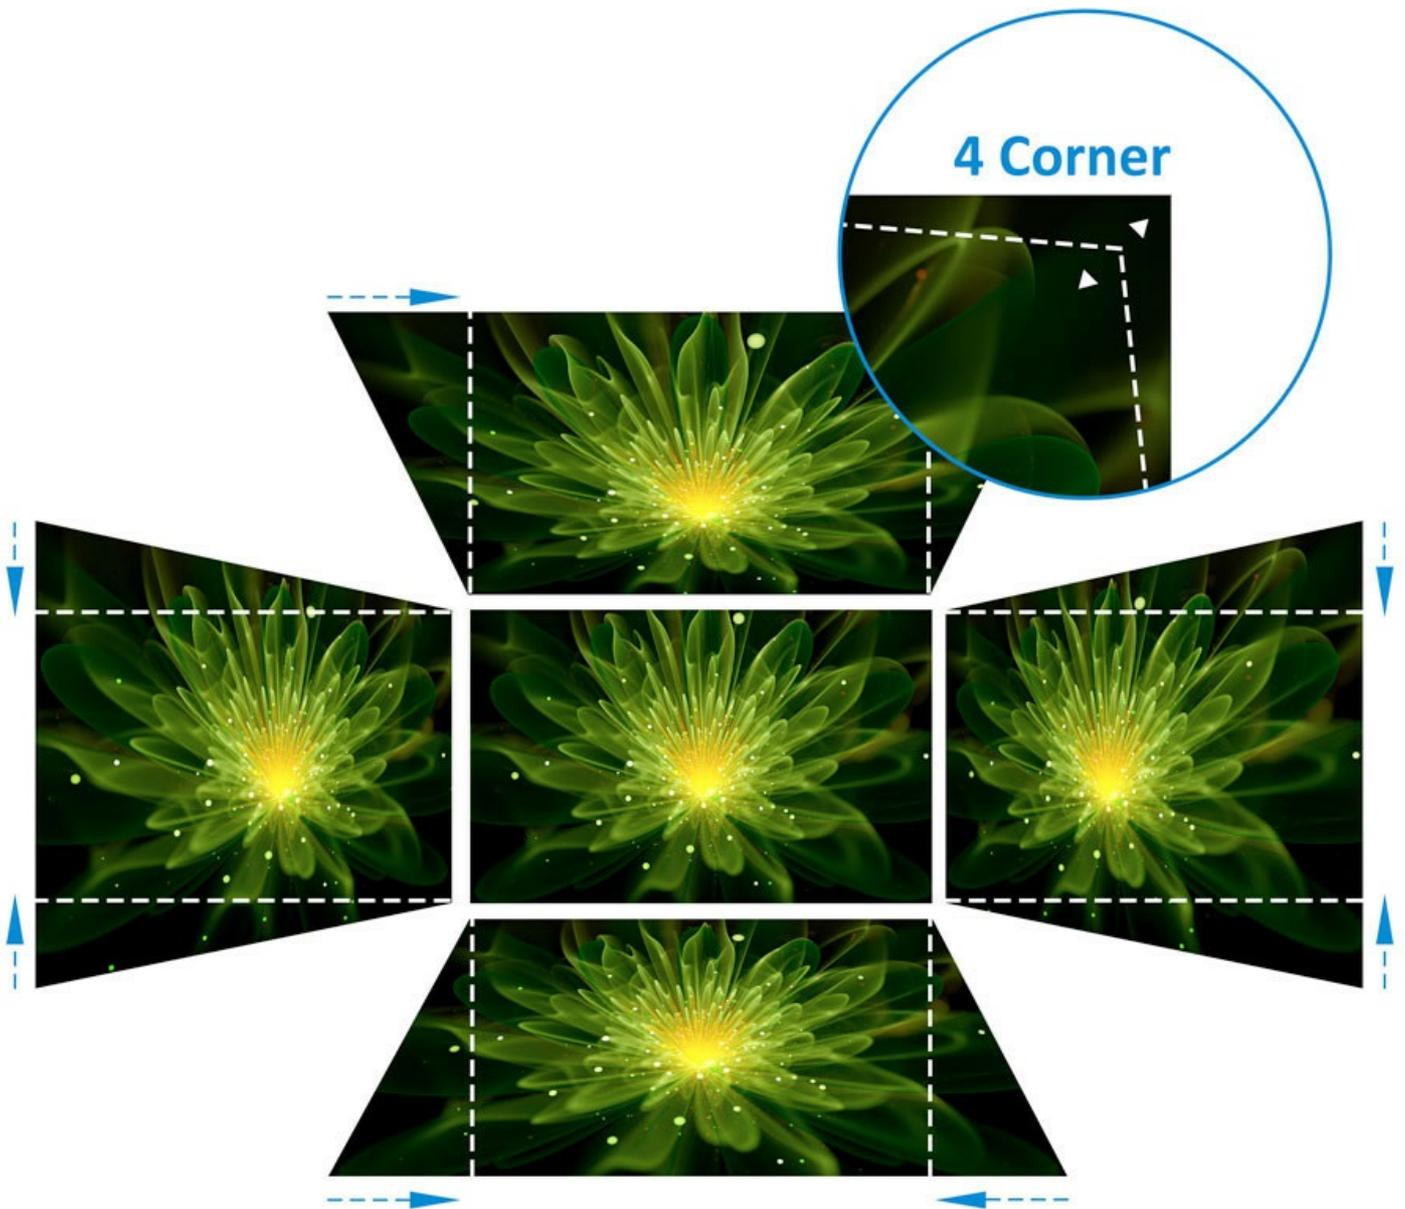

## A Simpler Way to Update Projector Software


ViewSonic Projector Software Update is available online and enables you to keep your projector firmware up to date easily and conveniently; no need to take your projector in to a service center for software updates.

*\*The latest projector software update can be found in the download section at the bottom of the page when available.*



## **SuperColor™ Accuracy**

ViewSonic's proprietary SuperColor™ Technology displays a wide color range, ensuring that users enjoy a true-to-life color performance in both bright and dark environments without sacrificing image quality.

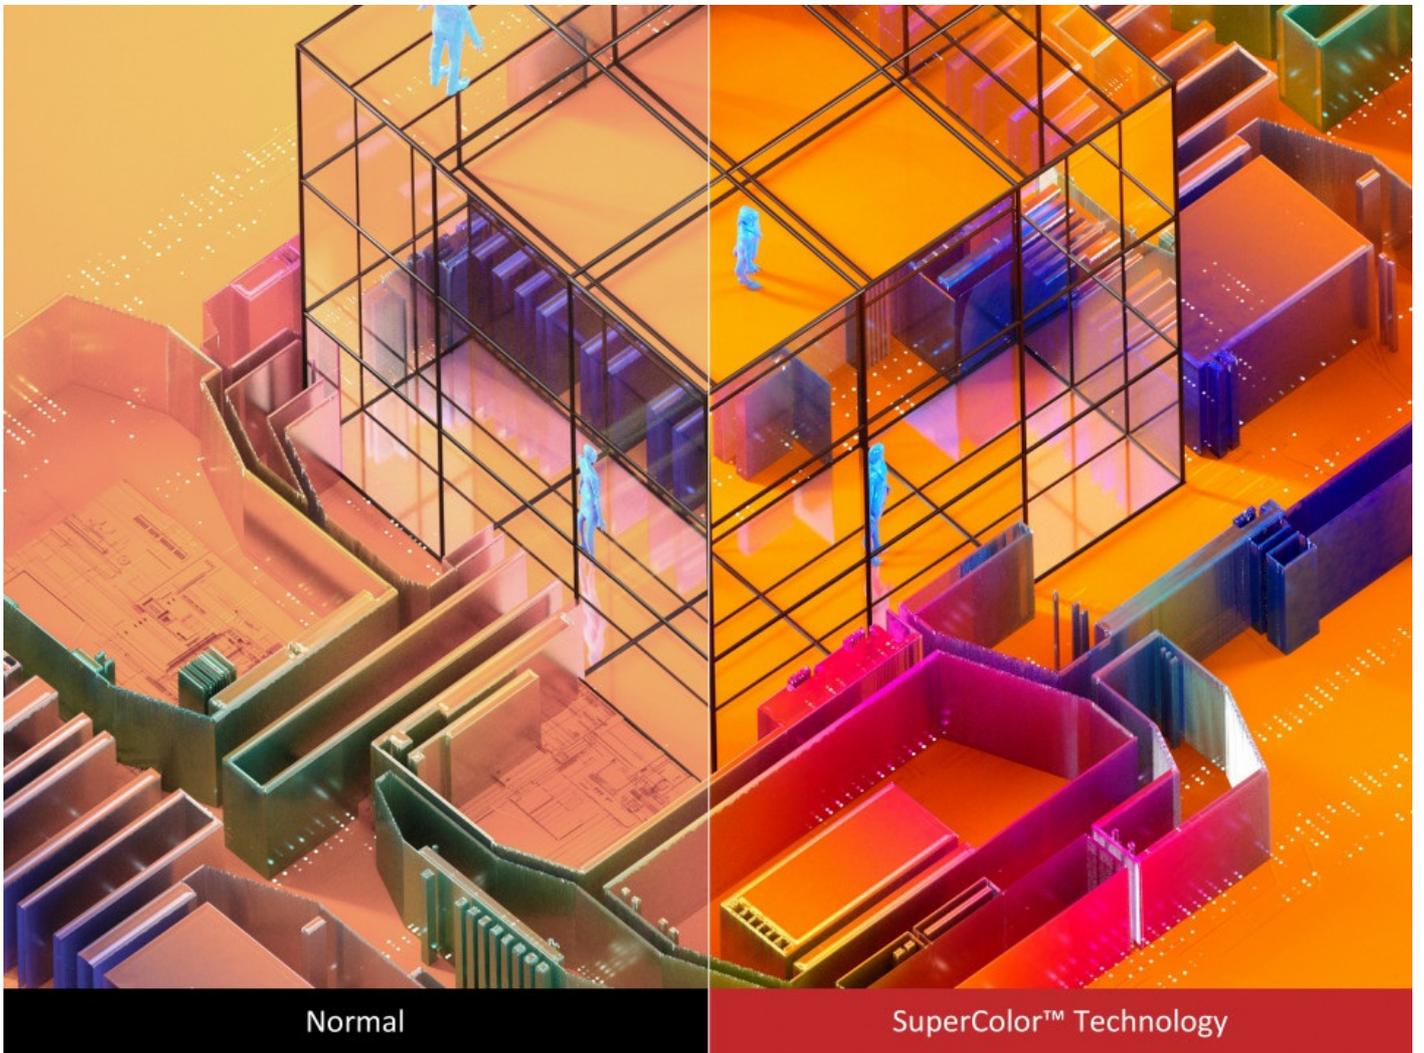

## Satisfying Audio Performance

The projector is embedded with a 10W speaker to deliver satisfying audio performance right out of the box.



**10W**


## Sufficient Connectivity

The projector provides dual HDMI ports to connect to your multimedia devices, ready for expanding your audiovisual experience.



## USB Type-A Power Supply

A built-in USB power output (5V/1.5A) can be used to supply power to HDMI dongles, eliminating the need for separate power adapters for connected dongles.

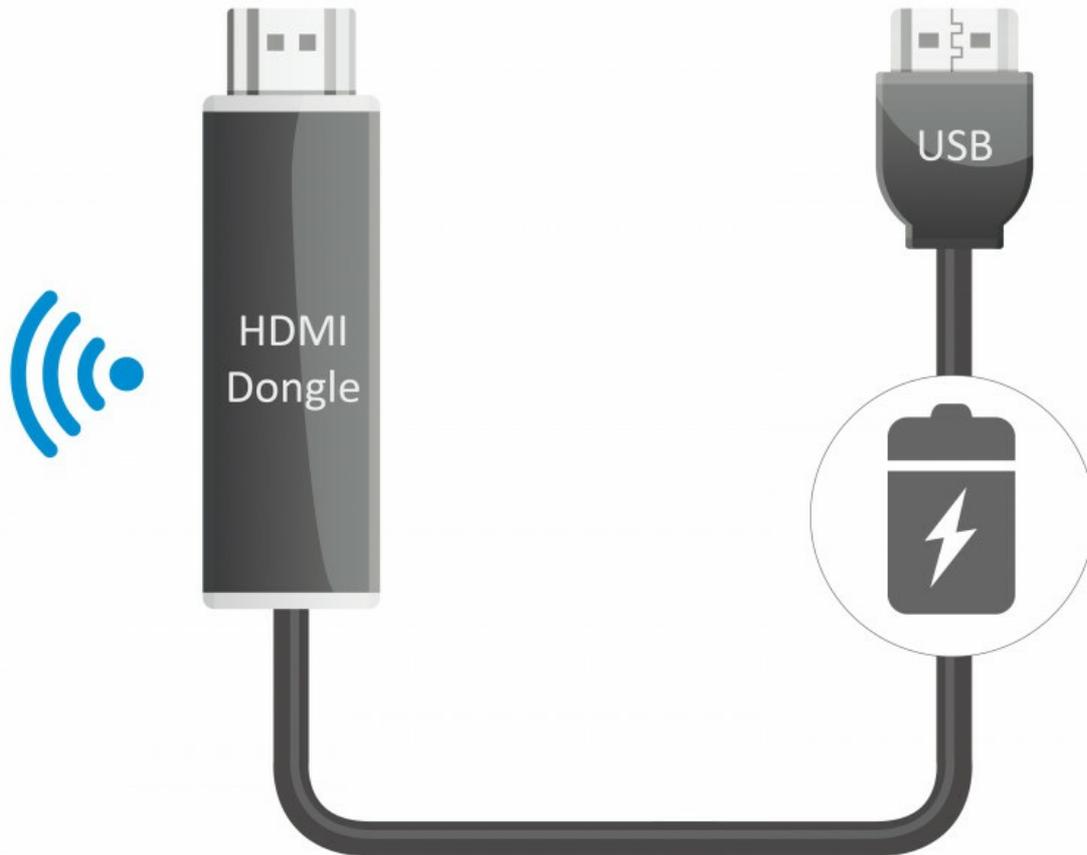

## Exterior & Rear I/O Connectors



1. LED Indicator
2. Keypad
3. Power Key

4. Zoom/Focus Ring
5. Adjustment Foot
6. Lens
7. Front IR
8. HDMI 2
9. HDMI 1
10. Audio In
11. Audio Out
12. USB Type A(5V/1.5A)
13. Computer In
14. Monitor Out
15. Video
16. RJ45
17. Kensington Lock
18. RS232

294 mm



218 mm



110 mm

## Technical Specifications

<b>Specification</b>	<b>Projection System</b>	0.55" XGA	
	<b>Native Resolution</b>	1024x768	
	<b>DMD Type</b>	DC3	
	<b>Brightness</b>	4000 (ANSI Lumens)	
	<b>Contrast Ratio with SuperEco Mode</b>	22000:1	
	<b>Display Color</b>	1.07 Billion Colors	
	<b>Light Source Type</b>	Lamp	
	<b>Light Source Life (hours) with Normal Mode</b>	6000	
	<b>Light Source Life (hours) with SuperEco Mode</b>	20000	
	<b>Lamp Watt</b>	203W	
	<b>Lens</b>	F=2.59-2.87, f=16.88-21.88mm	
	<b>Projection Offset</b>	115%+/-5%	
	<b>Throw Ratio</b>	1.51-1.97	
	<b>Optical Zoom</b>	1.3x	
	<b>Digital Zoom</b>	0.8x-2.0x	
	<b>Image Size</b>	30"-300"	
	<b>Throw Distance</b>	0.9m-12m, (100"@3.1m)	
	<b>Keystone</b>	H:+/-40° , V:+/-40°	
	<b>Audible Noise (Normal)</b>	32dB	
	<b>Audible Noise (Eco)</b>	28dB	
	<b>Input Lag</b>	16ms	
	<b>Resolution Support</b>	VGA(640 x 480) to FullHD(1920 x 1080)	
	<b>HDTV Compatibility</b>	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
	<b>Video Compatibility</b>	NTSC, PAL, SECAM	
	<b>Horizontal Frequency</b>	15K-102KHz	
	<b>Vertical Scan Rate</b>	23-120Hz	
	<b>Input</b>	<b>Computer in (share with component)</b>	1
		<b>Composite</b>	1
		<b>HDMI</b>	2 (HDMI 1.4/ HDCP 1.4)
		<b>Audio-in (3.5mm)</b>	1
<b>Output</b>	<b>Monitor out</b>	1	
	<b>Audio out (3.5mm)</b>	1	
	<b>Speaker</b>	10W	
	<b>USB Type A (Power)</b>	1 (5V/1.5A)	
<b>Control</b>	<b>RS232 (DB 9-pin male)</b>	1	
	<b>RJ45 (LAN control)</b>	1	
<b>Others</b>	<b>Power Supply Voltage</b>	100-240V+/- 10%, 50/60Hz, (AC in)	
	<b>Power Consumption</b>	Normal: 280W, Standby: <0.5W	
	<b>Operating Temperature</b>	0~40°C	
	<b>Net Weight</b>	2.35kg	

**Dimensions (WxDxH) with Adjustment Foot** 294x218x110mm

---

**OSD Language** English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages

---

**Standard Accessory**

**Power Cord** 1

---

**VGA Cable** 1

---

**Remote Control** 1 , (w/ laser pointer)

---

**QSG** 1