




- SuperClear® IPS technology
- Frameless bezel and metallic triangle stand
- Full HD 1080p resolution
- Flicker-Free and Blue Light Filter
- HDMI, DisplayPort and VGA inputs

The ViewSonic VX3276-mhd-2 is the perfect blend of style and performance with features that include a sizeable 32" (31.5" viewable) panel, a minimalist design, metallic silver triangle stand, and a sleek edge-to-edge frameless bezel give the monitor a premium feel that fits nicely both at home and in the office.

VX3276-mhd-2 features 1080p resolution, SuperClear® IPS technology and dual integrated speakers to produce astonishing visual and sound effect from multimedia contents.

Premium Design

The monitor takes on an architecturally inspired design aesthetic fused with modern form factors such as an ultra-slim profile, modern frameless bezel, and a unique triangle stand.

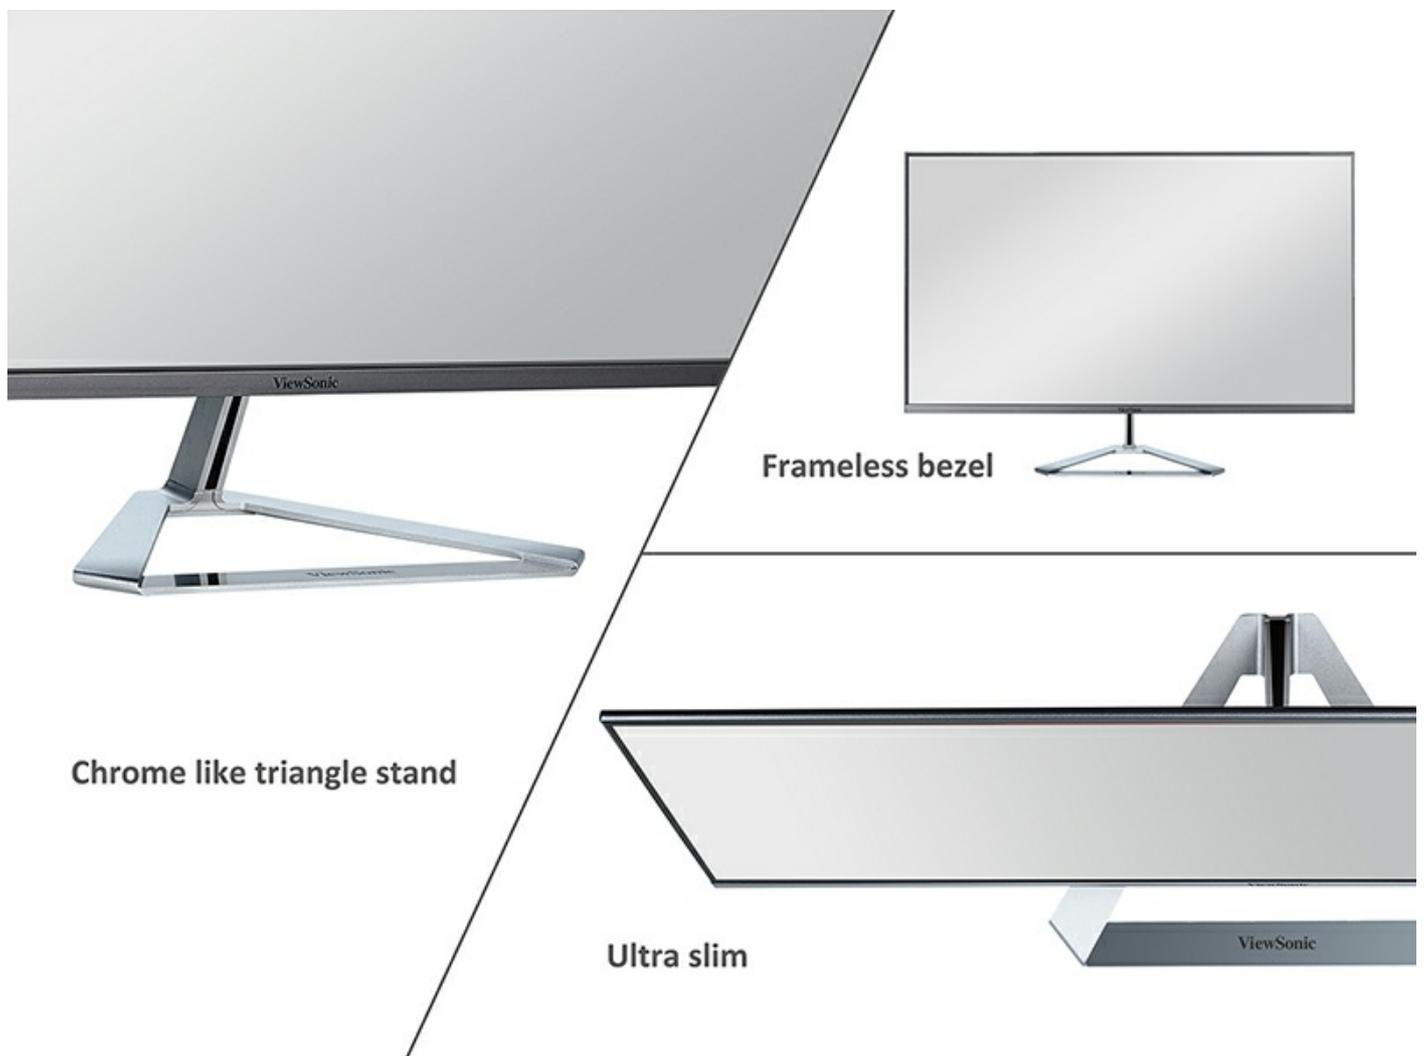


SuperClear[®] IPS Technology

Enjoy rich, vivid colour with consistent levels of brightness, no matter the vantage point. With SuperClear[®] IPS technology, the monitor delivers the same image quality whether you are looking at the screen from above, below, the front, or the side.



Full HD 1080p

The VX3276-mhd-2 features Full HD 1920x1080 resolution for clear pixel-by-pixel image performance. You'll experience amazing clarity and detail whether working, gaming, or enjoying the latest entertainment.

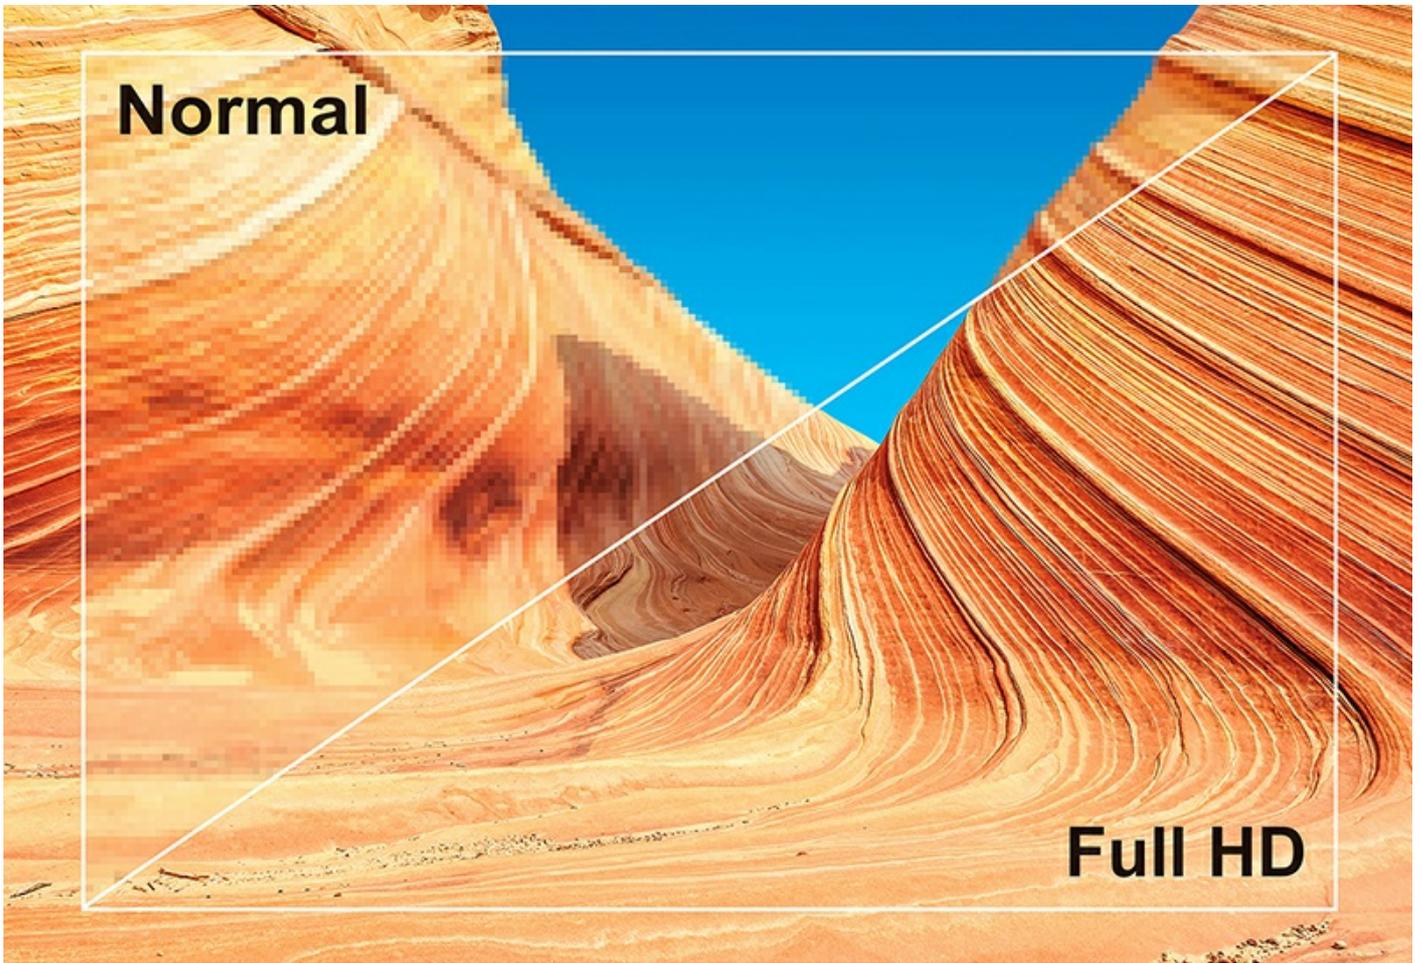

Flexible Connectivity

DisplayPort, HDMI, and VGA inputs offer a wide range of compatibility, giving you the ultimate flexibility whether you are watching a video, playing games, or working.

HDMI



DisplayPort



VGA



Powerful Sound

The dual integrated stereo speakers deliver powerful sound. When paired with incredible screen performance, the combination provides complete multi-sensory immersion.



ViewMode Optimized Settings

ViewSonic's ViewMode includes optimized "Game," "Movie," "Web," "Text," "Mono", and "Mac" presets. Each preset offers specialized enhancements to gamma curve, colour temperature, contrast, and brightness to deliver the optimal viewing experience for different applications.



GAME



MOVIE



TEXT



WEB




MONO



MAC


Comfortable Viewing

Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods.

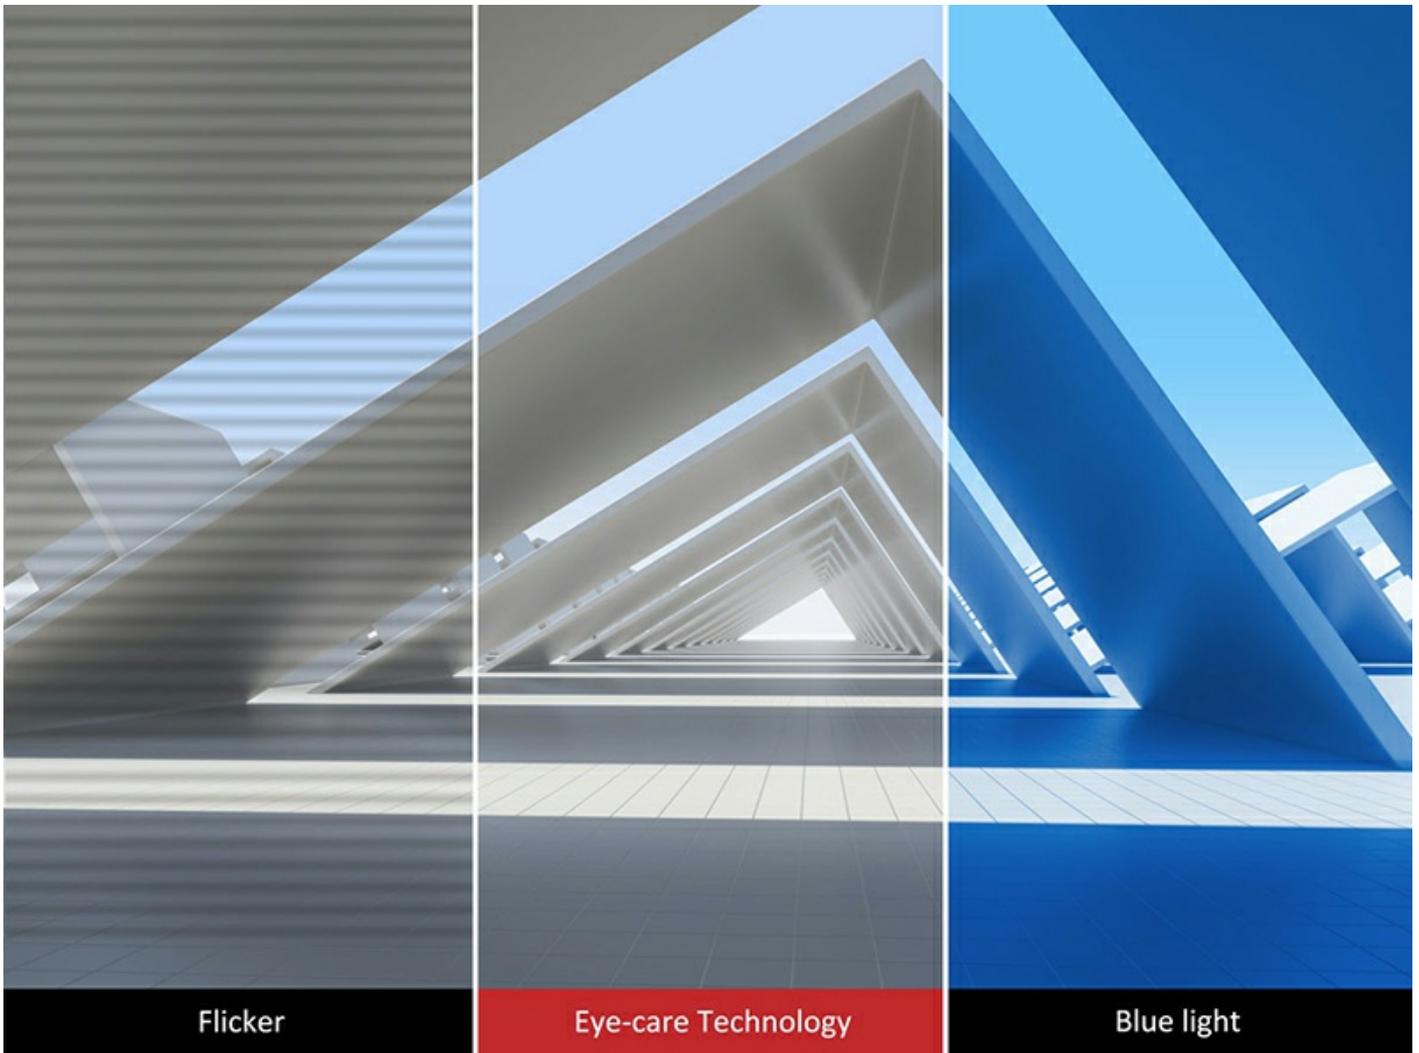


Low Energy Consumption

VX3276-mhd-2's energy-saving Eco-mode is ENERGY STAR compliant and incorporates energy efficiency and power savings into the monitor's stunning screen performance.

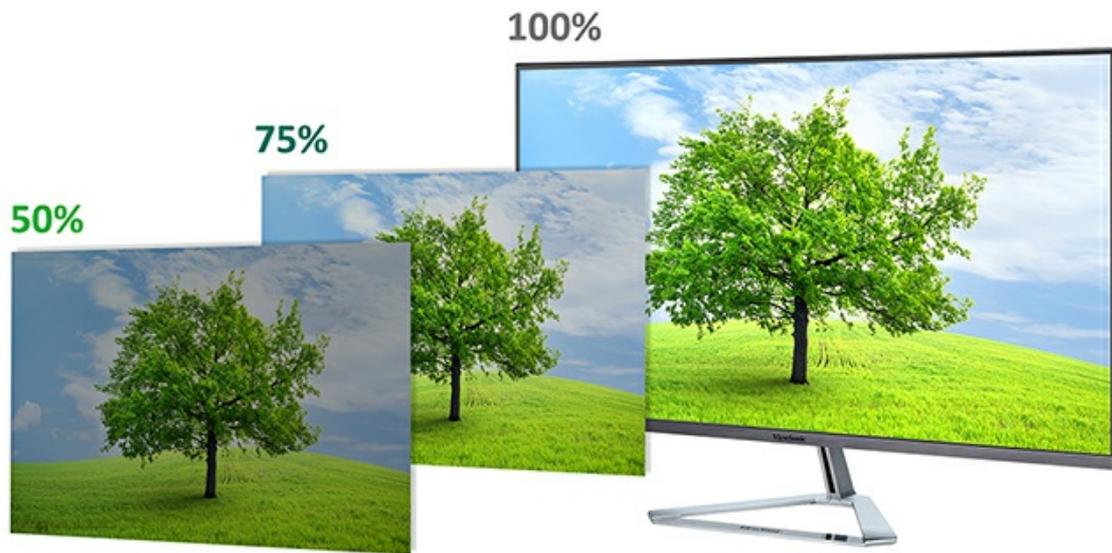

VESA-Compatibility

Conveniently mount the monitor to your preference by utilizing the 100mm x 100mm VESA-compatible mount design.

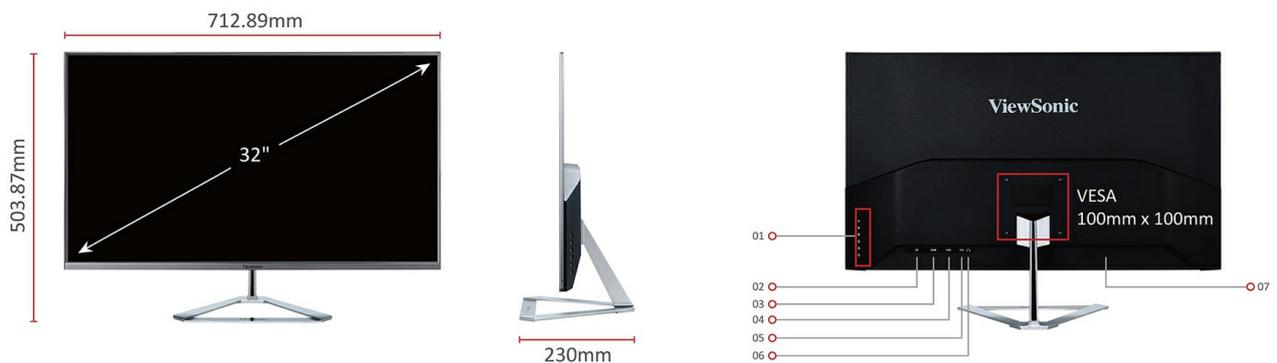

1. Menu Controls
2. DisplayPort
3. HDMI
4. VGA
5. Audio in
6. Earphone
7. AC Power In

Technical Specifications

LCD PANEL	Monitor Size	32"W (31.5" Viewable)
	Panel Technology	SuperClear® IPS TFT CD
	Resolution	1920 x 1080
	Display Area	698.4mm (H) x 392.85mm (V)
	Aspect Ratio	16:9
	Brightness	250 cd/m2 (Typ)
	Contrast Ratio	1200:1 (Typ)
	Dynamic Contrast Ratio	80,000,000:1
	Viewing Angle	178 degrees / 178 degrees (Typ)
	Response Time	4 ms (GtG)
	Colour Gamut	75% of NTSC (Typ)
	Panel Surface	Anti-Glare (semi-glossy) type, Haze 1%
	Pixel Pitch	0.364mm (H) x 0.364mm (V)
INPUT SIGNAL	Frequency	VGA: Fh = 24 ~ 83KHz ; Fv = 50 ~ 75Hz HDMI: Fh = 24 ~ 83KHz ; Fv = 50 ~ 75Hz DisplayPort: Fh = 24 ~ 83KHz ; Fv = 50 ~ 75Hz
	Sync	VGA: Separate Sync HDMI: TMDS DisplayPort: PCI-E
COMPATIBILITY	PC	Windows 7, Windows 8, Windows 8.1, Windows 10 certified
	Mac®	Power Mac tested
CONNECTOR	Digital	HDMI x 1 (v1.4 compatible) DisplayPort x 1 (v1.2 compatible)
	Analog	VGA x 1
	Audio Out	Earphone out x 1 (3.5mm plug)
	Audio In	Audio in x 1 (3.5mm plug)
SPEAKERS		2W x 2
POWER	Power	3-pin plug (CEE22) x 1
	Voltage	AC 100-240V (Universal); 50/60Hz
	Consumption	36W
	Optimize	31W
	Conserve	26W
ERGONOMICS	Tilt	15 ~ -4 degrees
SPECIAL FEATURES		DDC/2B, DDC/CI, HDCP, Detachable Base, KENSINGTON Microsaver Security Compatible
WALL MOUNT	VESA®	100mm x 100mm
OPERATING CONDITIONS	Temperature (° F / ° C)	32°F to 104°F (0°C to 40°C)
	Humidity	20% to 90% (no condensation)

DIMENSIONS (W x H x**D) (mm)**

Physical with stand (mm)	712.89mm (W) x 503.87mm (H) x 230mm (D)
Physical without stand (mm)	712.89mm (W) x 416.4mm (H) x 38.2mm (D)
Packaging (mm)	785mm (W) x 498mm (H) x 112mm (D)

WEIGHT

Net with stand (kg)	6.2kg
Net without stand (kg)	5.6kg
Gross (kg)	8.2kg

REGULATIONS

CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, BSMI, RCM, GEMS, KC, e-Standby

PACKAGE CONTENTS

LCD Display
Power Cable
HDMI Cable
Quick Start Guide
*Actual content may differ from market to market

ViewSonic® Limited Warranty

ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

For more product information, visit us at www.viewsoniceurope.com

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.