

5000 ANSI Lumens High Brightness WXGA Installation Projector



PG800W




Delivering 5000 ANSI lumens of brightness in WXGA resolution, the ViewSonic PG800W is the perfect installation projector for large, brightly lit environments such as conference rooms, classrooms, or any other large public venue. Utilizing an intuitive design, PG800W is highly flexible and easy to install. It comes equipped with centered lens and vertical lens shift, which offer extra flexibility that makes the projectors more adaptable to difficult installation locations. The concealed PortAll® compartment can accommodate optional HDBT or wireless dongles for versatile content projection. PG800W is certified by Creston, AMX, PJ Link and Extron, meaning that it can be controlled remotely via LAN connection for efficient projector management. Other notable features include SuperColor™ technology for true-to-life image color, SonicExpert, and SonicMode for incredibly clear sound which allows PG800W to deliver a professional audio-visual experience.

Ease of Use

Centered Projection

A centered lens design makes this projector ideal for upgrading existing centered lens installations by allowing users to use the same positioning as existing ceiling mounts and projection screens.

Centered Lens

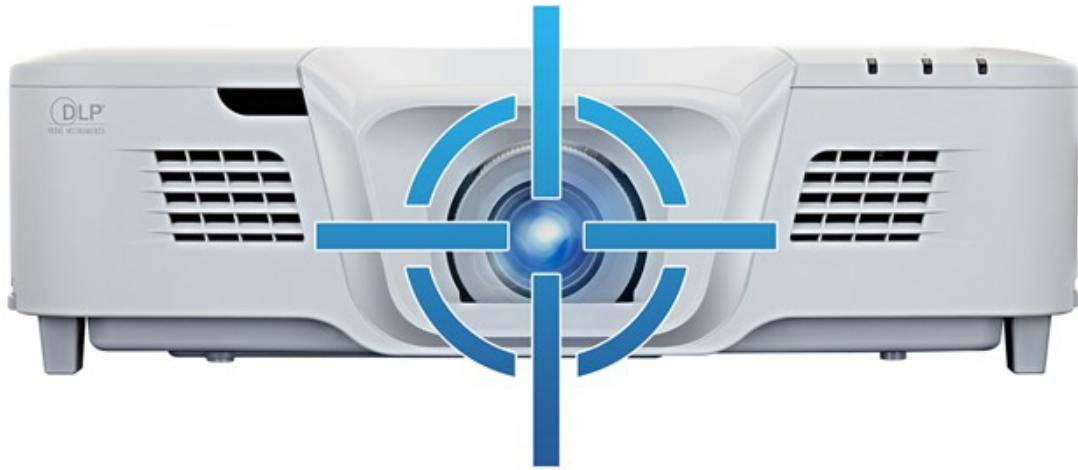

Installation Flexibility

Vertical Lens Shift offers vertical adjustments of the projection lens, providing flexible installation options with less placement restrictions.

Vertical **Lens Shift**



Auto V Keystone

The automatic vertical keystone improves usability and makes setup and image positioning more

convenient for a perfectly proportioned picture every time.

AutoV Keystone



Cleverly Concealed Streaming

ViewSonic's exclusive PortAll® concealed compartment has an integrated HDMI port that lets you discretely stream multimedia content from an HDBT dongle or other wireless dongle. Connected dongles can be powered via the built-in Micro USB cable which charges the dongle with 10 watts of power.

PortAll®



Effortless Maintenance

The tool-free top cover design is easy enough for users to check the maintenance room without any hassle. Under the top cover, the ample room provides users to adjust or change a dongle or lamp conveniently, making ceiling mounted applications easier to manage.

Easy-access Top Cover



Secure Power Connection

The power cable locker fastens the power cable connection in place to avoid the inconvenience of an unexpected projector shutdown due to a loose or accidentally unplugged cord.

Power Cable Locker



Centralized Control

A centrally located, easy-to-use power button acts as the control center for projector management. In addition to turning the projector on and off, it is also an IR receiver and indicates whether any dongles are connected to the PortAll® compartment via an LED that lights up the power button.

4-in-1 Power Button



LAN Control

PG800W is Creston, AMX, PJ Link, and Extron certified for easy-to-use network management that allows administrators to remotely observe and control up to 256 projectors at one time through a LAN IP. An advanced real-time alert system sends status updates about power, lamp life, and unit location for efficient monitoring.

LAN Control



Optional ViewSonic® HB10B HDBT dongle


Based on HDBT technology, ViewSonic HB10B fits into the PortAll® compartment and is a stable method to transmit uncompressed 4K UHD audio & video over distances of up to 35 meters*.

* When combined with a Cat.5e/6/7 LAN cable

- 1080P up to 70m by Cat 6
- 4K/2k up to 35m by Cat 6

Optional **HB10B Dongle**

70_m

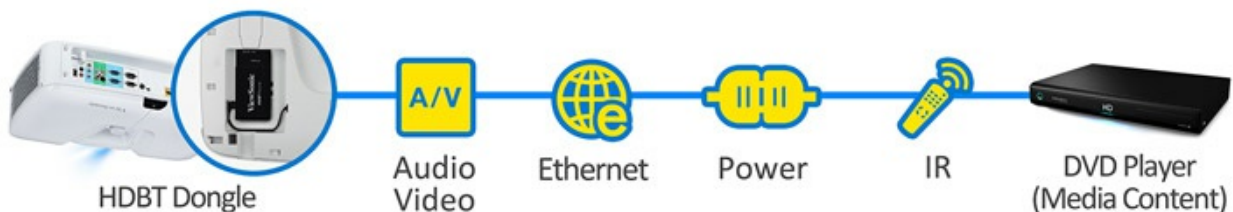

Impressive AudioVisual Performance


Amazing Color Accuracy

ViewSonic's proprietary SuperColor™ Technology displays a wide range of visible color to ensuring stunningly vibrant images.

SuperColor™ Technology



Normal

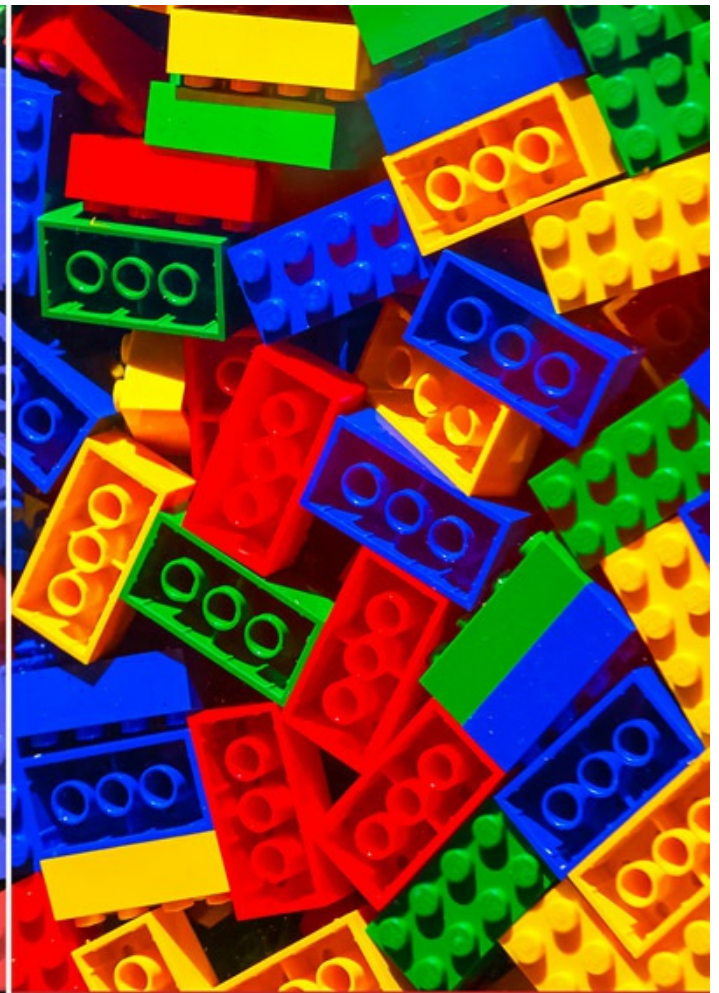

SuperColor™ Technology

Powerful Sound

PG800W is designed with ViewSonic's SonicExpert® technology which incorporates an enlarged speaker chamber, a more powerful amplifier, and dual 10W cube speakers for room filling sound.

SonicExpert® Technology




Optimized Audio

SonicMode uses an embedded DSP chip to optimize sound performance for 3 different usage scenarios.

- **Standard Mode:** A preset mode that offers the best sound levels for general use.
- **Speech Mode:** A preset mode that enhances the sound of spoken words, making it ideal for projecting speeches and lectures.
- **Entertainment Mode:** a preset mode that is fine-tuned with more bass and richer mid-high frequencies; ideal for music and movies.

SonicMode

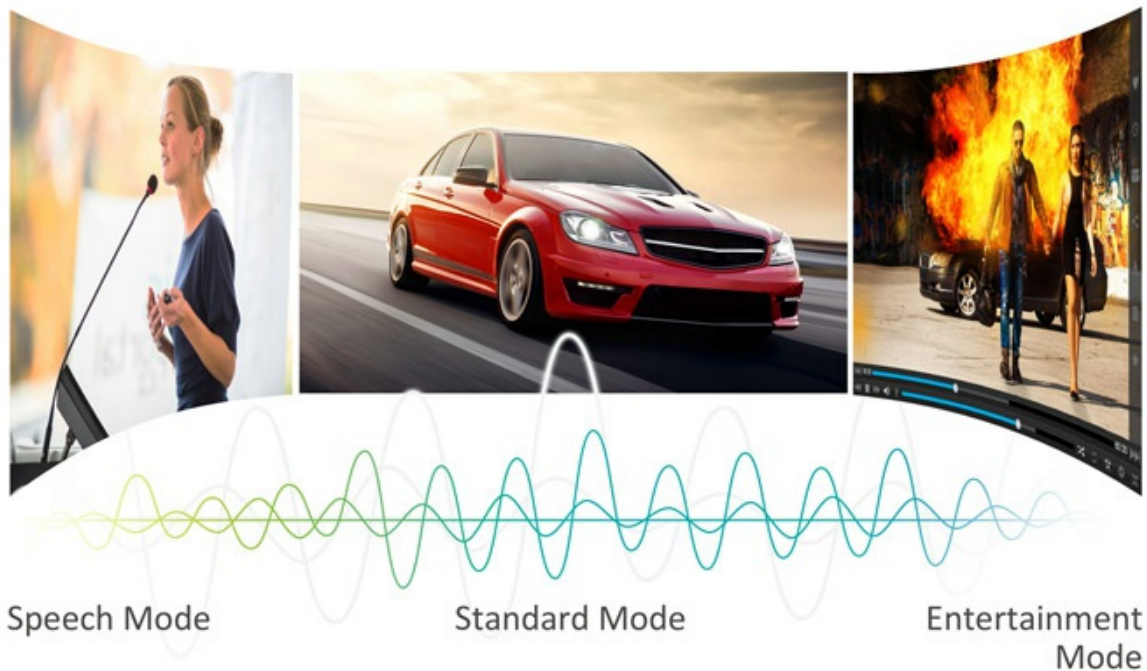

Low TCO

Instant Activation

Auto Power On and Signal Power On can be used to get your projector up and running instantly:

- **Auto Power On:** The projector will power on automatically by simply connecting the power cord or through HDMI CEC.
- **Signal Power On:** The projector will power on automatically upon detection of a VGA cable connection.

Auto Power On



Extended Lamp Life

Sleep Timer allows you to put the projector into sleep mode automatically after a determined period of inactivity to extend the projector's lamp life.

Sleep Timer



Reduced Energy Consumption


When no signal has been detected, the projector will automatically power off to conserve energy.

Auto Power Off



Exterior & Rear I/O Connectors



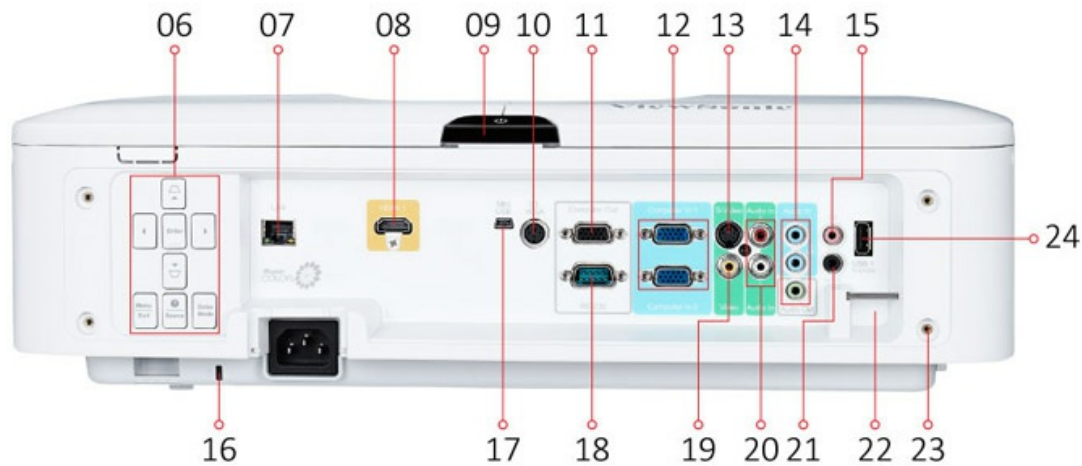

1. Front IR receiver
2. Lens shift adjustment
3. 1.3X optical zoom
4. 10W x 2 cube
5. Air filter
6. keypad
7. LAN
8. HDMI
9. 4-in-1 power button
10. 3D VESA
11. Monitor out
12. Computer in
13. S-Video
14. Audio in/out
15. IR out
16. Kensington lock
17. Mini USB for service
18. RS232
19. Video
20. Audio in L/R(RCA)
21. 12V out
22. Security bar
23. Cable management screw hole
24. USB type A (5V/2A)

Technical Specifications

SPECIFICATION		
Projection system		0.65" WXGA
Native Resolution		1280 x 800
DC type		DC3
Brightness		5000 ANSI lumens
Contrast Ratio with SuperEco mode		5000:1 (with Eco mode)
Display Color		1.07 Billion Colors

	Light Source	Lamp
	Light source life (Nor/SuperEco)	2000/2500 (Nor/Eco)
	Lamp Watt	370W
	Lens	F=2.59-2.87, f=16.88-21.88mm
	Projection Offset	110%+/-5%
	Throw Ratio	1.21-1.57
	Image size	30" - 300"
	Throw Distance	0.78m-10.14m(100" @2.61m)
	Keystone	±40° (Vertical)
	Lens Shift V. Range	Yes (+7.5%, -0%)
	Optical Zoom	1.3x
	Audible Noise (Eco)	33dB
	Resolution Support	VGA(640 x 480) to FullHD(1920 x 1080)
	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
	Horizontal Frequency	15K~102KHz
	Vertical Scan Rate	23~120Hz
Input	Computer in (share with component)	2
	Composite	1
	S-video	1
	Audio-in (3.5mm)	2
	Audio-in (RCA R/L)	1
	Microphone in	1 (shared with Audio-in 2)
	HDMI	2 (Back & PortALL)
	3D VESA (Sync)	1
Output	Monitor out	1
	Audio out (3.5mm)	1
	Speaker	10W Cube x 2
	USB type A (Power)	1 (5V2A)
	USB type Micro B (Power)	1 (5V2A Front)
	12V Trigger	1 (3.5mm)
	IR out	1
Control	RS232	1
	RJ45	1
	USB type mini B (Services)	1
	Wired Remote Control - Out	1 (Share to top IR)
Others	Power Supply Voltage	100-240V+/- 10%, 50/60Hz AC
	Power Consumption	Normal: 574W Standby: <0.5W
	Operating Temperature	0~40°C
	Carton	Brown
	Net Weight	6.2kg
	Dimensions (WxDxH) w/adjustment foot	470x316x140mm
	Language	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese
Standard Accessory	Power Cord	1

VGA cable	1
Remote Control	1 (w/Laser pointer)
QSG & CD	QSG: 1 / CD: NA